




CITEL

Type 2 AC surge protector - unipolar

DS71R-120



- Discover our latest innovation : the [DAC80-10-150](#)
- Re-inforced Type 2 AC surge protector
- In : 30 kA
- Imax : 70 kA
- Pluggable module by phase
- Remote signaling option
- IEC 61643-11, EN 61643-11 compliance
- UL1449 ed.5 approved

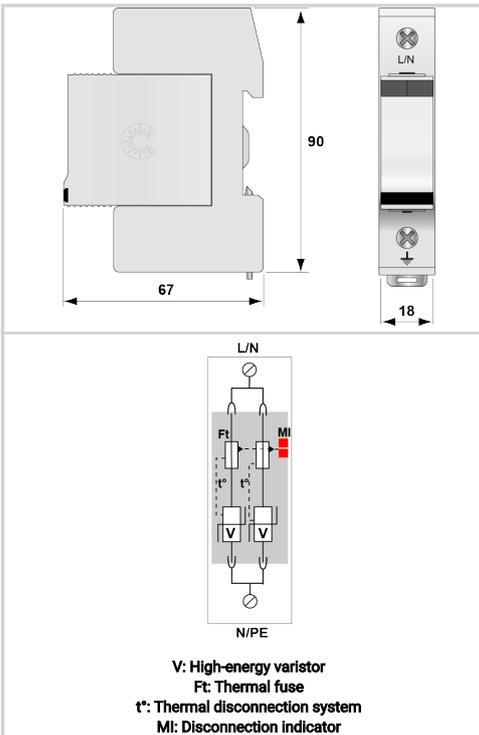

| Electrical Characteristics | | |
|--|------------|--|
| SPD type | IEC | 2 |
| Network | | 120/208 V |
| Nominal line voltage | Un | 120 Vac |
| Max. AC operating voltage | Uc | 150 Vac |
| Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection | UT | 180 Vac withstand |
| Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection | UT | 230 Vac disconnection |
| Residual Current Leakage current to Ground | Ipe | < 1 mA |
| Follow current | If | None |
| Nominal discharge current 15 x 8/20 μs impulses | In | 30 kA |
| Max. discharge current max. withstand @ 8/20 μs by pole | Imax | 70 kA |
| Total Maximum discharge current max. total withstand @ 8/20 μs | Imax Total | 70 kA |
| Connection mode(s) | | L/N or N/PE |
| Protection mode(s) | | Common Mode or Differential Mode |
| Protection level @ In (8/20μs) | Up | 1 kV |
| Residual voltage at 5 kA @ 5 kA (8/20μs) | Up-5kA | 0.6 kV |
| Admissible short-circuit current | Iscrc | 25 000 A |
| Mechanical Characteristics | | |
| Technology | | MOV |
| SPD configuration | | Single phase |
| Connection to Network | | By screw terminals: 2.5-25mm ² / by bus |
| Format | | Plug-in modular box |
| Mounting | | Symmetrical rail 35 mm (EN 60715) |
| Housing material | | Thermoplastic UL94 V-0 |
| Operating temperature | Tu | -40/+85°C |
| Protection rating | | IP20 |
| Failsafe mode | | Disconnection from AC network |
| Disconnection indicator | | 2 mechanical indicators by pole |
| Spare module(s) | | DSM70R-120 |
| Remote signaling of disconnection | | option DS71RS-120 : output on changeover contact |
| Dimensions | | See diagram |
| Weight | | 0.114 kg |
| Disconnectors | | |
| Thermal disconnector | | Internal |
| Installation ground fault breaker | | Type 'S' or delayed |
| Back-up protection device | | 100 A min. - 125 A max. - Fuses type gG |
| Standards | | |
| Standards compliance | | IEC 61643-11 / EN 61643-11 / UL1449 ed.5 |
| Certification | | cRUus |
| Part number | | |
| 321601 | | |





CITEL

Type 2 AC surge protector - unipolar

DS71R-120

