


VM120-DIN



- ✦ Protection against over-under voltage of AC network
- ✦ Automatic operation
- ✦ Re-engagement delayed
- ✦ Operating indicators
- ✦ Easy installation on DIN rail
- ✦ EN 50550 compliance

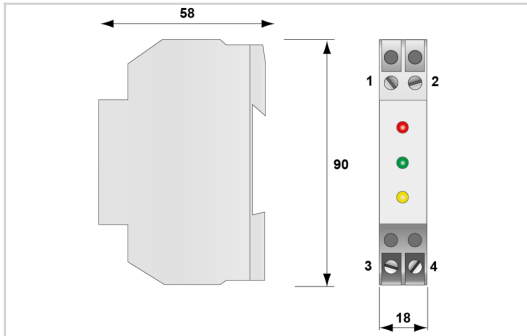

Electrical Characteristics	
Network	120 V single-phase
Mechanical Characteristics	
Disconnection	Undervoltage: < 95 Vac Overvoltage:> 140 Vac Disconnection delay: 1 second Reset time: 1 second
Format	DIN Box 1 module of 18 mm
Voltage/operating indicator	Yellow LED: undervoltage (disconnection) Green LED: Correct voltage Red LED: overvoltage (disconnection)
Weight	0.056 kg
Standards	
Standards compliance	EN 50550
Certification	
Part number	
3569012	