





CITEL



Support for E280 plug-in modules

FPSU08-V

- Support for MDF or DIN rail mounting
- Max. number of pairs : 8

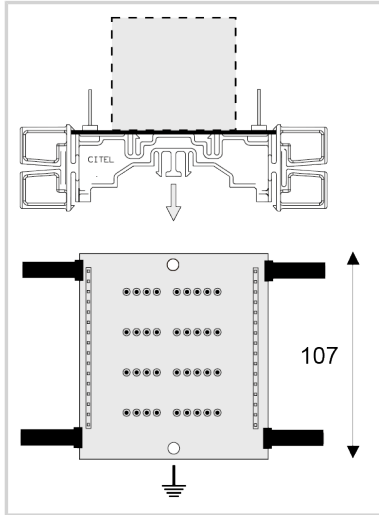

Electrical Characteristics

Network		Low current
Max. frequency	f max.	20 MHz
Insertion loss		< 1 dB
Max. load current @25°C	IL	10 A
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	Imax	10 kA
Nominal discharge current <i>C2 Category</i>	In	5 kA
Impulse current <i>2 x 10/350 μs Test - D1 Category</i>	Iimp	2.5 kA

Mechanical Characteristics

SPD configuration		8 pairs max
Connection to Network		2 nuts with M4 screws
Format		Bracket/board
Mounting		MDF Din rail
Housing material		Thermoplastic UL94-V0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Connection		Screw terminal - section max. 1,5 mm ²
Max. number of E280s		4.0000
Max. number of pairs		8.0000
Dimensions		See diagram
Weight		0.12 kg

Part number

71462

