


SPT-203



- ✦ 7-inch TFT display with touch-screen
- ✦ Compatible with all CITEL ranges and other brand products
- ✦ Testing the MOV, GDT and TVS components
- ✦ Automatically test and judge CITEL pluggable Surge Protectors
- ✦ Auto test mode and manual test mode
- ✦ Automatically save test data
- ✦ Database management
- ✦ Portable and convenient

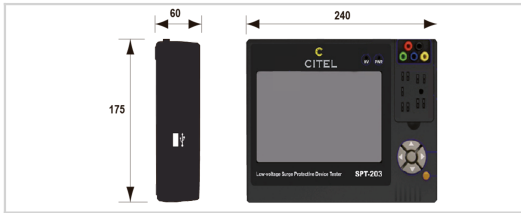

Electrical Characteristics	
Power	230 V
Leakage current measurement error	+/- 5 %
MOV measurement : 1mA voltage range	1 to 2000 V
MOV measurement : Leakage current range	0 µA to 120 µA
GDT measurement : DC spark voltage range	1 to 2000 V
TVS measurement : Voltage range	0 to 500 V
Mechanical Characteristics	
Accessory(s) provided	- Housse de protection - Stylet
Operating and storage temperature	20°C / 50°C
Dimensions	See diagram
Part number	
790201	