





CITEL

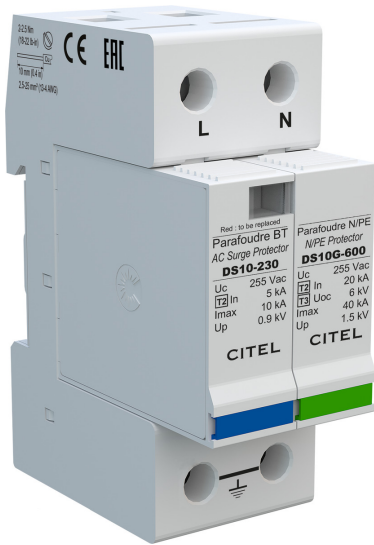

Type 2 (or 3) AC surge protector - Single-phase

DS12-230/G

- ▶ Discover our latest innovation : the [DAC15C-11-275](#)
- ▶ Type 2 (or 3) AC Multipolar surge protector
- ▶ In : 5 kA
- ▶ I_{max} total: 20 kA
- ▶ Pluggable module by phase
- ▶ Remote signaling option
- ▶ EN 61643-11, IEC 61643-11, UL1449 ed.5 compliance

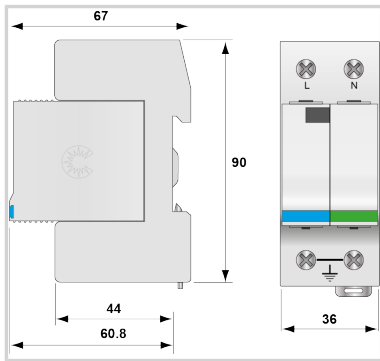

Electrical Characteristics		
SPD type	IEC	2+3
Network		230/400 V
AC system		TT-TN
Nominal line voltage	U _n	230 Vac
Max. AC operating voltage	U _c	255 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. <i>Without disconnection</i>	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn <i>Without disconnection or with safety disconnection</i>	UT	440 Vac disconnection
Temporary Over Voltage N/PE (TOV HT) <i>Without disconnection or with safety disconnection</i>	UT	1200 V/300A/200 ms withstand
Residual Current <i>Leakage current to Ground</i>	I _{pe}	None
Follow current	I _f	None
Nominal discharge current <i>15 x 8/20 μs impulses</i>	I _n	5 kA
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	I _{max}	10 kA
Total Maximum discharge current <i>max. total withstand @ 8/20 μs</i>	I _{max} Total	20 kA
Withstand on Combination waveform IEC 61643-11 <i>Class III test: 1.2/50μs - 8/20μs</i>	U _{oc}	10 kV
Withstand on overvoltages IEEE C62.41.1		10 kV
Connection mode(s)		L/N and N/PE
Protection mode(s)		Common/Differential mode
Protection level L/N <i>@ I_n (8/20μs)</i>	U _p L/N	0.9 kV
Protection level N/PE <i>@ I_n (8/20μs)</i>	U _p N/PE	1.5 kV
Admissible short-circuit current	I _{sc} cr	25 000 A
Mechanical Characteristics		
Technology		MOV+GDT
SPD configuration		Single phase
Connection to Network		By screw terminals: 2.5-25mm ² / by bus
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator by pole
Spare module(s)		DSM10-230 + DSM40G-600
Remote signaling of disconnection		option DS12S-230/G : output on changeover contact
Dimensions		See diagram
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		20 A min. - 125 A max. - Fuses type gG
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		UL Recognized
Part number		
471511		





CITEL

Type 2 (or 3) AC surge protector - Single-phase

DS12-230/G

