




CITEL

Type 2 AC surge protector - 3-phase

DACF25-30-150



- Type 2 AC Multipolar surge protector
- In : 15 kA
- I_{max} total : 75 kA
- Internal Fuse
- Pluggable module for each phase
- Remote signaling option
- NF EN 61643-11, IEC 61643-11, UL1449 ed.5 compliance

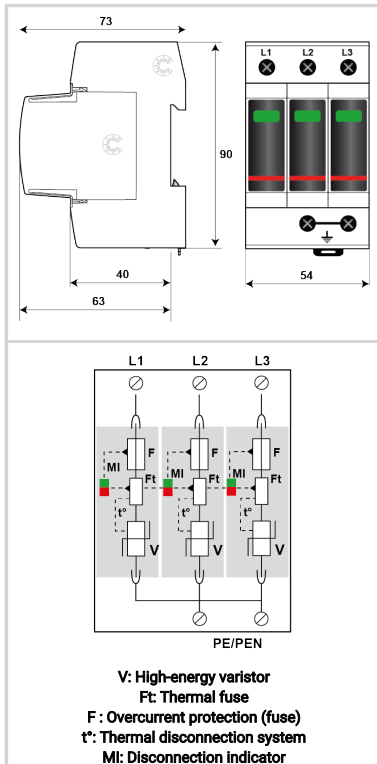

Electrical Characteristics

| | | |
|--|------------------------|-----------------------|
| SPD type | IEC | 2 |
| Network | | 120/208 V 3-phase |
| AC system | | TNC |
| Max. AC operating voltage | U _c | 150 Vac |
| Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection | UT | 180 Vac withstand |
| Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection | UT | 230 Vac disconnection |
| Residual Current Leakage current to Ground | I _{pe} | < 1 mA |
| Follow current | I _f | None |
| Nominal discharge current 15 x 8/20 μs impulses | I _n | 15 kA |
| Max. discharge current max. withstand @ 8/20 μs by pole | I _{max} | 25 kA |
| Total Maximum discharge current max. total withstand @ 8/20 μs | I _{max} Total | 75 kA |
| Connection mode(s) | | L/PE |
| Protection level L/PE @ I _n (8/20 μs) | Up L/PE | 1.2 kV |
| Residual voltage L/PE at 5 kA @ 5 kA (8/20 μs) | Up-5kA | 0.6 kV |
| Admissible short-circuit current | I _{scrr} | 100 000 A |

Mechanical Characteristics

| | | |
|---|----------------|---|
| Technology | | MOV |
| SPD configuration | | 3-phase |
| Connection to Network | | By screw terminals: 2.5-25mm ² (35mm ² rigid) |
| Format | | Plug-in modular box |
| Mounting | | Symmetrical rail 35 mm (EN 60715) |
| Housing material | | Thermoplastic UL94 V-0 |
| Operating temperature | T _u | -40/+85°C |
| Protection rating | | IP20 |
| Failsafe mode | | Disconnection from AC network |
| Disconnection indicator | | 1 mechanical indicator by pole - Red/Green |
| Spare module(s) | | MDACF25-150 |
| Remote signaling of disconnection | | option DACF25S-30-150 : output on changeover contact |
| Wiring for remote signaling | | 1.5 mm ² max. |
| Max. Voltage/Current for remote signaling | | 250 V / 0.5 A (AC) / 30 V / 3 A (DC) |
| Dimensions | | See diagram - 3 TE (EN43880) |

Disconnectors

| | | |
|-----------------------------------|--|---|
| Thermal disconnector | | Internal |
| Installation ground fault breaker | | Type 'S' or delayed |
| Back-up protection device | | internal (equivalent AC rating : 40 A, gG Type) |

Standards

| | | |
|----------------------|--|--|
| Standards compliance | | IEC 61643-11 / EN 61643-11 / UL1449 ed.5 |
|----------------------|--|--|

Part number

821410113

