


DLA-24D3



- ✦ High current data transmission
- ✦ Common mode and differential mode protection
- ✦ Data lines, including those isolated from Earth
- ✦ Compact DIN rail enclosure, high density protection
- ✦ Protection of shield wire
- ✦ Plug-out with line cut-off
- ✦ Location and test categories: D1, C2, C3
- ✦ IEC 61643-21 compliance

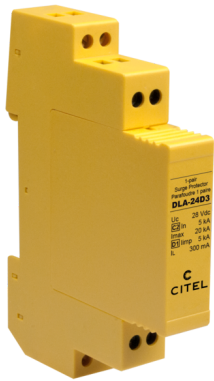

	Electrical Characteristics																																					
<p>G: 3-electrode gas tube Gb: 2-electrode gas tube R: Resistor D: Clamping diode</p>	<table border="1"> <tr><td>Network</td><td></td><td>4-20 mA</td></tr> <tr><td>Nominal line voltage</td><td>Un</td><td>24 V</td></tr> <tr><td>Max. DC operating voltage</td><td>Uc</td><td>28 Vdc</td></tr> <tr><td>Max. frequency</td><td>f max.</td><td>> 3 MHz</td></tr> <tr><td>Max. load current @25°C</td><td>IL</td><td>300 mA</td></tr> <tr><td>Max. discharge current max. withstand @ 8/20 μs by pole</td><td>Imax</td><td>20 kA</td></tr> <tr><td>Line inductance (± 10 %)</td><td></td><td>non</td></tr> <tr><td>Protection Level C3 (10/1000μs), 300 applications@10 A, X-X (Line/Line)</td><td>Up</td><td>40 V</td></tr> <tr><td>Protection level C3 (10/1000μs), 300 applications@10 A, X-C (Line/Earth)</td><td>Up</td><td>40 V</td></tr> <tr><td>Impulse current 2 x 10/350μs Test - D1 Category</td><td>Iimp</td><td>5 kA</td></tr> <tr><td>Nominal discharge current C2 Category</td><td>In</td><td>5 kA</td></tr> <tr><td>Line resistance (± 10%)</td><td></td><td>4.7 Ohm</td></tr> </table>		Network		4-20 mA	Nominal line voltage	Un	24 V	Max. DC operating voltage	Uc	28 Vdc	Max. frequency	f max.	> 3 MHz	Max. load current @25°C	IL	300 mA	Max. discharge current max. withstand @ 8/20 μs by pole	Imax	20 kA	Line inductance (± 10 %)		non	Protection Level C3 (10/1000μs), 300 applications@10 A, X-X (Line/Line)	Up	40 V	Protection level C3 (10/1000μs), 300 applications@10 A, X-C (Line/Earth)	Up	40 V	Impulse current 2 x 10/350μs Test - D1 Category	Iimp	5 kA	Nominal discharge current C2 Category	In	5 kA	Line resistance (± 10%)		4.7 Ohm
Network		4-20 mA																																				
Nominal line voltage	Un	24 V																																				
Max. DC operating voltage	Uc	28 Vdc																																				
Max. frequency	f max.	> 3 MHz																																				
Max. load current @25°C	IL	300 mA																																				
Max. discharge current max. withstand @ 8/20 μs by pole	Imax	20 kA																																				
Line inductance (± 10 %)		non																																				
Protection Level C3 (10/1000μs), 300 applications@10 A, X-X (Line/Line)	Up	40 V																																				
Protection level C3 (10/1000μs), 300 applications@10 A, X-C (Line/Earth)	Up	40 V																																				
Impulse current 2 x 10/350μs Test - D1 Category	Iimp	5 kA																																				
Nominal discharge current C2 Category	In	5 kA																																				
Line resistance (± 10%)		4.7 Ohm																																				
	Mechanical Characteristics																																					
	<table border="1"> <tr><td>Technology</td><td></td><td>GDT+TVS diode</td></tr> <tr><td>SPD configuration</td><td></td><td>1-pair+shielded</td></tr> <tr><td>Connection to Network</td><td></td><td>By screw terminal: cross section 0.5-2.5mm²</td></tr> <tr><td>Format</td><td></td><td>Plug-in DIN box</td></tr> <tr><td>Mounting</td><td></td><td>Symmetrical rail 35 mm (EN 60715)</td></tr> <tr><td>Housing material</td><td></td><td>Thermoplastic UL94 V-0</td></tr> <tr><td>Operating temperature</td><td>Tu</td><td>-40/+85°C</td></tr> <tr><td>Protection rating</td><td></td><td>IP20</td></tr> <tr><td>Failsafe mode</td><td></td><td>Short-circuit</td></tr> <tr><td>Disconnection indicator</td><td></td><td>Transmission interrupt - default mode 2</td></tr> <tr><td>Spare module(s)</td><td></td><td>DLAM-24D3</td></tr> <tr><td>Dimensions</td><td></td><td>See diagram</td></tr> </table>		Technology		GDT+TVS diode	SPD configuration		1-pair+shielded	Connection to Network		By screw terminal: cross section 0.5-2.5mm ²	Format		Plug-in DIN box	Mounting		Symmetrical rail 35 mm (EN 60715)	Housing material		Thermoplastic UL94 V-0	Operating temperature	Tu	-40/+85°C	Protection rating		IP20	Failsafe mode		Short-circuit	Disconnection indicator		Transmission interrupt - default mode 2	Spare module(s)		DLAM-24D3	Dimensions		See diagram
Technology		GDT+TVS diode																																				
SPD configuration		1-pair+shielded																																				
Connection to Network		By screw terminal: cross section 0.5-2.5mm ²																																				
Format		Plug-in DIN box																																				
Mounting		Symmetrical rail 35 mm (EN 60715)																																				
Housing material		Thermoplastic UL94 V-0																																				
Operating temperature	Tu	-40/+85°C																																				
Protection rating		IP20																																				
Failsafe mode		Short-circuit																																				
Disconnection indicator		Transmission interrupt - default mode 2																																				
Spare module(s)		DLAM-24D3																																				
Dimensions		See diagram																																				
	Standards																																					
	<table border="1"> <tr><td>Standards compliance</td><td></td><td>IEC 61643-21 / EN 61643-21 / UL497B</td></tr> <tr><td>Certification</td><td></td><td>UL Listed</td></tr> </table>		Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B	Certification		UL Listed																														
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B																																				
Certification		UL Listed																																				
	Part number																																					
	6403011																																					