




CITEL



ZPAC1-8VG-31-275

- ▶ Type 1+2+3 AC Surge protection
- ▶ VG Technology
- ▶ For 40 mm busbar systems
- ▶ Iimp 8 kA (10/350 μs)
- ▶ Reduces energy costs: Does not produce flow current and leakage current
- ▶ Certified IEC 61643-11 and EN 61643-11

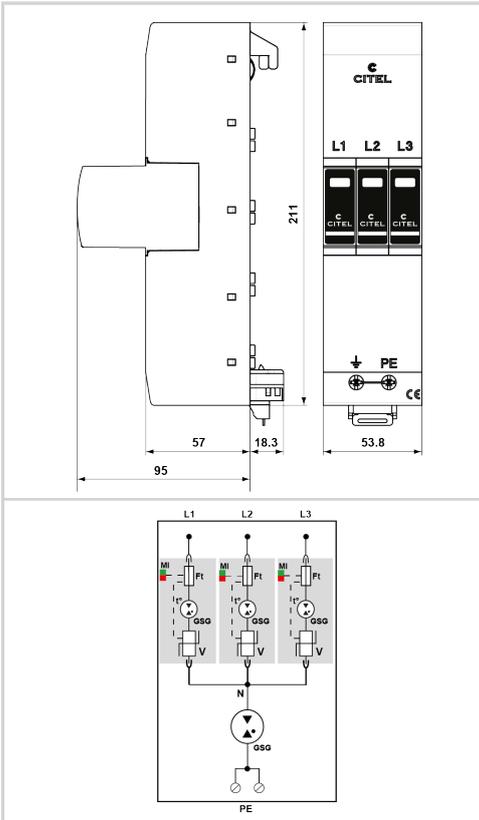

**Electrical Characteristics**

SPD type	IEC	1+2+3
Network		230/400 V 3-phase+N
AC system		TT-TNS
Nominal line voltage	Un	230/400 Vac
Max. AC operating voltage	Uc	275 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac withstand
Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection	UT	1200 V/300A/200 ms withstand
Residual Current Leakage current to Ground	Ipe	None
Follow current	If	None
Nominal discharge current 15 x 8/20 μs impulses	In	20 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I <sub>max</sub>	50 kA
Impulse current by pole max. withstand 10/350μs by pole	I <sub>imp</sub>	8 kA
Total lightning current max. total withstand @ 10/350μs	I <sub>total</sub>	32 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs	U <sub>oc</sub>	6 kV
Withstand on overvoltages IEEE C62.41.1		20 kV
Specific energy by pole max. withstand 10/350 μs	W/R	16 kJ/ohm
Connection mode(s)		L/N and N/PE
Protection mode(s)		Common/Differential mode
Protection level L/N @ In (8/20μs)	Up L/N	1.5 kV
Protection level L/PE @ In (8/20μs)	Up L/PE	1.5 kV
Residual voltage L/N at 5 kA @ 5 kA (8/20μs)	Up-5kA	0.7 kV
Admissible short-circuit current	I <sub>sc</sub>	50 000 A

**Mechanical Characteristics**

Technology		VG Technology (MOV+GSG)
SPD configuration		3-phase+Neutral
Connection to Network		By 40mm busbar and wire for PE: 6-35mm <sup>2</sup> (50mm <sup>2</sup> )
Format		Plug-in modular box
Mounting		40 mm busbar systems
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20



# CITEL

## Type 1+2+3 AC surge protector - 3-phase+N

### ZPAC1-8VG-31-275

Failsafe mode	Disconnection from AC network
Disconnection indicator	1 mechanical indicator by pole
Spare module(s)	ZMDAC1-8VG-275
Remote signaling of disconnection	none
Dimensions	See diagram
Weight	0.74 kg
<b>Disconnectors</b>	
Thermal disconnecter	Internal
Installation ground fault breaker	Type 'S' or delayed
Back-up protection device	max. 315 A (gL/gG)
<b>Standards</b>	
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 5ed.
Certification	KEMA
<b>Part number</b>	
<b>64006</b>	

