





# CITEL

## Compact 1-phase Type 2 (or 3) surge protector - 230 V - Pluggable

### DAC40C-11-320

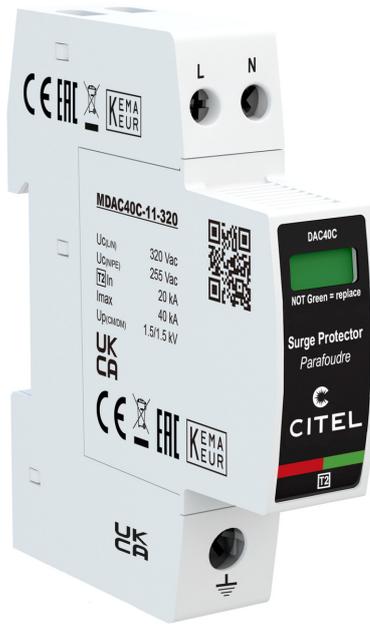

- ▶ Compact single-phase type 2 (or 3) surge protector
- ▶ In : 20 kA
- ▶ I<sub>max</sub> : 40 kA
- ▶ Commun/Differential mode
- ▶ Pluggable module
- ▶ Remote signaling (option)
- ▶ EN 61643-11, IEC 61643-11 certified
- ▶ UL1449 ed.5 compliance

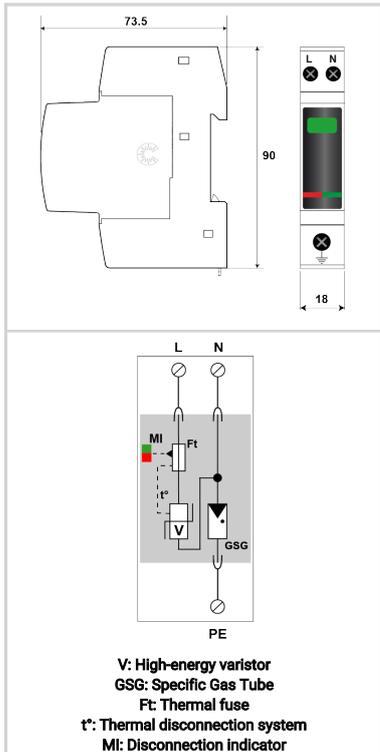

Electrical Characteristics		
SPD type	IEC	2
Network		230 V single-phase
AC system		TT-TN
Max. AC operating voltage	U <sub>c</sub>	320 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. <i>Without disconnection</i>	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn <i>Without disconnection or with safety disconnection</i>	UT	440 Vac disconnection
Temporary Over Voltage N/PE (TOV HT) <i>Without disconnection or with safety disconnection</i>	UT	1200 V/300A/200 ms withstand
Residual Current <i>Leakage current to Ground</i>	I <sub>pe</sub>	None
Follow current	I <sub>f</sub>	None
Nominal discharge current <i>15 x 8/20 μs impulses</i>	I <sub>n</sub>	20 kA
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	I <sub>max</sub>	40 kA
Total Maximum discharge current <i>max. total withstand @ 8/20 μs</i>	I <sub>max</sub> Total	40 kA
Protection mode(s)		L/N
Protection level L/N <i>@ I<sub>n</sub> (8/20μs)</i>	U <sub>p</sub> L/N	1.5 kV
Protection level N/PE <i>@ I<sub>n</sub> (8/20μs)</i>	U <sub>p</sub> N/PE	1.5 kV
Admissible short-circuit current	I <sub>sc</sub>	10 000 A
Mechanical Characteristics		
Technology		MOV+GDT
SPD configuration		Single phase
Connection to Network		By screw terminals: L/N = 1.5-10mm <sup>2</sup> (16mm <sup>2</sup> rigid) or PE = 2.5-25mm <sup>2</sup> (35mm <sup>2</sup> rigid)
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T <sub>u</sub>	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator - Red/Green
Spare module(s)		MDAC40C-11-320
Remote signaling of disconnection		Option DAC40CS-11-320: output on changeover contact
Wiring for remote signaling		1.5 mm <sup>2</sup> max.
Max. Voltage/Current for remote signaling		250 V / 0.5 A (AC) / 30 V / 3 A (DC)
Dimensions		See diagram - 1TE (EN43880)
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		50 A min. - 125 A max. - Fuses Type gG
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		KEMA
Part number		



CITEL

**Compact 1-phase Type 2 (or 3) surge protector - 230 V - Pluggable**

**DAC40C-11-320**

821520311

