




CITEL

DC power surge protector Type 2 - 75 Vdc - Compact

DDC40C-20-100



- ✔ Type 2 DC power surge protector
- ✔ Compact design
- ✔ I_{max}: 40 kA
- ✔ Pluggable module
- ✔ Remote signaling (option)
- ✔ Low Up protection level
- ✔ Compliance prIEC 61643-41 and UL1449 ed.5

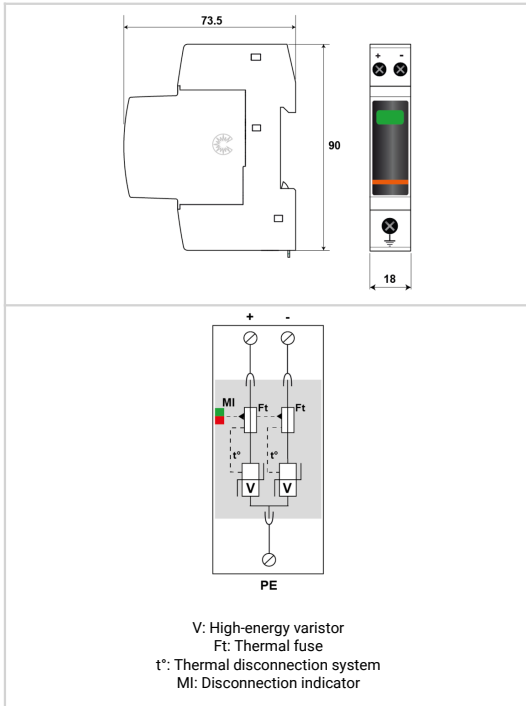

Electrical Characteristics		
SPD type	IEC	2
Network		DC network 75 Vdc
Nominal PV voltage	U _{ocstc}	75 Vdc
Max. AC operating voltage	U _c	75 Vac
Max. PV operating voltage	U _{cpv}	100 Vdc
Max. DC operating voltage	U _c	100 Vdc
Max. load current @25°C	I _L	20 A
Residual Current Leakage current to Ground	I _{pe}	< 0.2 mA
PV Permanent Operating current Current consumption at U _{cpv}	I _{cpv}	< 0.1 mA
Nominal discharge current 15 x 8/20 μs impulses	I _n	20 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	40 kA
Current withstand short circuit PV	I _{scpv}	1000 A
Connection mode(s)		+/-PE
Protection level +/-PE (-/PE) @ I _n (8/20μs)	U _p	390 V
Mechanical Characteristics		
Technology		MOV
Connection to Network		By screw terminals: 1.5-10mm ² (actives wires) and 2.5-25mm ² (ground)
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from DC network
Disconnection indicator		1 mechanical indicator - Red/Green
Spare module(s)		MDDC40C-20-100
Remote signaling of disconnection		Option DDC40CS-20-100 : output on changeover contact
Dimensions		See diagram - 1TE (EN43880)
Weight		0.113 kg
Disconnectors		
Thermal disconnector		Internal
Back-up protection device		50 A min. - 125 A max. - Fuses Type gG
Standards		
Standards compliance		prIEC 61643-41 and UL1449 ed.5
Part number		
828410511		

