
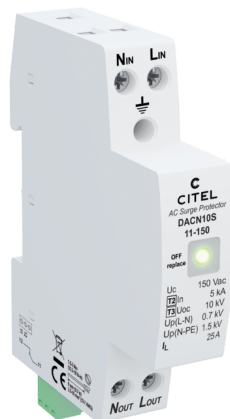



**DACN10S-11-150**


- ✦ Cost effective single-phase surge protector
- ✦ Type 2 or 3 monobloc compact
- ✦ I<sub>n</sub>/I<sub>max</sub>: 5 kA/10 kA
- ✦ Max. load current: 25A
- ✦ 2-port configuration (series mounting)
- ✦ Remote signaling
- ✦ EN 61643-11, IEC 61643-11, UL1449 ed.5 compliance



V: High-energy varistor  
 GSG: Specific Gas Tube  
 LED: Disconnection indicator  
 Ft: Thermal fuse  
 t\*: Thermal disconnection system

Electrical Characteristics		
SPD type	IEC	2 (or 3)
Network		120 V single-phase
AC system		TT-TN
Max. AC operating voltage	U <sub>c</sub>	150 Vac
Max. load current @25°C	I <sub>L</sub>	25 A
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	180 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	230 Vac disconnection
Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection	UT	1200 V/300A/200 ms breaker disconnection
Residual Current	I <sub>pe</sub>	None
Leakage current to Ground		
Nominal discharge current 15 x 8/20 μs impulses	I <sub>n</sub>	5 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I <sub>max</sub>	10 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	I <sub>max</sub> Total	20 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs	U <sub>oc</sub>	10 kV
Protection level L/N @ I <sub>n</sub> (8/20μs)	U <sub>p</sub> L/N	0.7 kV
Protection level N/PE @ I <sub>n</sub> (8/20μs)	U <sub>p</sub> N/PE	1.5 kV
Admissible short-circuit current	I <sub>sc</sub>	10 000 A
Mechanical Characteristics		
SPD configuration		Single phase
Connection to Network		By screw terminals: 1.5-10mm <sup>2</sup>
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T <sub>u</sub>	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		Green LED OFF
Remote signaling of disconnection		output on NC contact
Wiring for remote signaling		1.5 mm <sup>2</sup> max.
Max. Voltage/Current for remote signaling		250 V / 0.5 A (AC) / 30 V / 2 A (DC)
Dimensions		See diagram - 1TE (EN43880)
Weight		0.092 kg
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		Fuses type gG - 25A
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Part number		
70111012		