


DLAWTS1-12D3



- ✦ Surge protection for 1-pair
- ✦ Pluggable protection module
- ✦ Optical fault indication
- ✦ Remote signalling (DLAWTS1-48DC required for power supply)
- ✦ Indirect shield connection
- ✦ Indirect earthing
- ✦ Signal interruption when module is disconnected
- ✦ Conforms to IEC 61643-21, VDE 0845-3-1 and UL497B

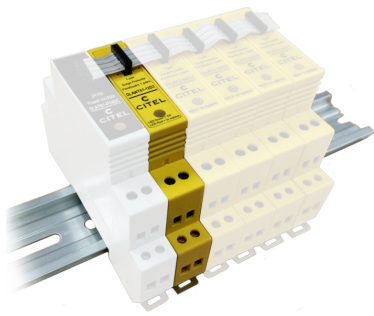

	Electrical Characteristics																																																							
<p>G: 3-electrode gas tube Gb: 2-electrode gas tube PTC: Thermal resistor R: Resistor D: Clamping diode Vi: Indicator</p>	<table border="1"> <tr> <td>Network</td> <td></td> <td>RS232, RS485</td> </tr> <tr> <td>Nominal line voltage</td> <td>Un</td> <td>12 V</td> </tr> <tr> <td>Max. AC operating voltage</td> <td>Uc</td> <td>10 Vac</td> </tr> <tr> <td>Max. DC operating voltage</td> <td>Uc</td> <td>15 Vdc</td> </tr> <tr> <td>Max. frequency</td> <td>f max.</td> <td>> 3 MHz</td> </tr> <tr> <td>Insertion loss</td> <td></td> <td>< 1 dB</td> </tr> <tr> <td>Max. load current @25°C</td> <td>IL</td> <td>300 mA</td> </tr> <tr> <td>Max. discharge current max. withstand @ 8/20 μs by pole</td> <td>Imax</td> <td>20 kA</td> </tr> <tr> <td>Line inductance (± 10 %)</td> <td></td> <td>non</td> </tr> <tr> <td>Protection mode(s)</td> <td></td> <td>Common/Differential mode</td> </tr> <tr> <td>Protection Level C3 (10/1000μs), 300 applications@10 A, X-X (Line/Line)</td> <td>Up</td> <td>30 V</td> </tr> <tr> <td>Protection level C3 (10/1000μs), 300 applications@10 A, X-C (Line/Earth)</td> <td>Up</td> <td>30 V</td> </tr> <tr> <td>Max. capacitance</td> <td>C</td> <td>< 50 pF</td> </tr> <tr> <td>Impulse current 2 x 10/350μs Test - D1 Category</td> <td>limp</td> <td>5 kA</td> </tr> <tr> <td>Nominal discharge current C2 Category</td> <td>In</td> <td>5 kA</td> </tr> <tr> <td>Line/Line Nominal discharge current C2 Category</td> <td>In L/L</td> <td>5 kA</td> </tr> <tr> <td>Nominal Discharge Current, X-C (Line/Earth) 8/20μs Test x 10 - C2 Category</td> <td>In L/PE</td> <td>5 kA</td> </tr> <tr> <td>Line resistance (± 10%)</td> <td></td> <td>4.7 Ohm</td> </tr> </table>		Network		RS232, RS485	Nominal line voltage	Un	12 V	Max. AC operating voltage	Uc	10 Vac	Max. DC operating voltage	Uc	15 Vdc	Max. frequency	f max.	> 3 MHz	Insertion loss		< 1 dB	Max. load current @25°C	IL	300 mA	Max. discharge current max. withstand @ 8/20 μs by pole	Imax	20 kA	Line inductance (± 10 %)		non	Protection mode(s)		Common/Differential mode	Protection Level C3 (10/1000μs), 300 applications@10 A, X-X (Line/Line)	Up	30 V	Protection level C3 (10/1000μs), 300 applications@10 A, X-C (Line/Earth)	Up	30 V	Max. capacitance	C	< 50 pF	Impulse current 2 x 10/350μs Test - D1 Category	limp	5 kA	Nominal discharge current C2 Category	In	5 kA	Line/Line Nominal discharge current C2 Category	In L/L	5 kA	Nominal Discharge Current, X-C (Line/Earth) 8/20μs Test x 10 - C2 Category	In L/PE	5 kA	Line resistance (± 10%)		4.7 Ohm
Network		RS232, RS485																																																						
Nominal line voltage	Un	12 V																																																						
Max. AC operating voltage	Uc	10 Vac																																																						
Max. DC operating voltage	Uc	15 Vdc																																																						
Max. frequency	f max.	> 3 MHz																																																						
Insertion loss		< 1 dB																																																						
Max. load current @25°C	IL	300 mA																																																						
Max. discharge current max. withstand @ 8/20 μs by pole	Imax	20 kA																																																						
Line inductance (± 10 %)		non																																																						
Protection mode(s)		Common/Differential mode																																																						
Protection Level C3 (10/1000μs), 300 applications@10 A, X-X (Line/Line)	Up	30 V																																																						
Protection level C3 (10/1000μs), 300 applications@10 A, X-C (Line/Earth)	Up	30 V																																																						
Max. capacitance	C	< 50 pF																																																						
Impulse current 2 x 10/350μs Test - D1 Category	limp	5 kA																																																						
Nominal discharge current C2 Category	In	5 kA																																																						
Line/Line Nominal discharge current C2 Category	In L/L	5 kA																																																						
Nominal Discharge Current, X-C (Line/Earth) 8/20μs Test x 10 - C2 Category	In L/PE	5 kA																																																						
Line resistance (± 10%)		4.7 Ohm																																																						
	Mechanical Characteristics																																																							
	<table border="1"> <tr> <td>Technology</td> <td></td> <td>GDT+Clamping diode+PTC (thermal resistor) + Resistor</td> </tr> <tr> <td>SPD configuration</td> <td></td> <td>1-pair+shielded</td> </tr> <tr> <td>Connection to Network</td> <td></td> <td>By screw terminal: cross section 0.5-2.5mm²</td> </tr> <tr> <td>Format</td> <td></td> <td>Plug-in DIN box</td> </tr> <tr> <td>Mounting</td> <td></td> <td>Symmetrical rail 35 mm (EN 60715)</td> </tr> <tr> <td>Housing material</td> <td></td> <td>Thermoplastic UL94 V-0</td> </tr> <tr> <td>Operating temperature</td> <td>Tu</td> <td>-40/+85°C</td> </tr> <tr> <td>Protection rating</td> <td></td> <td>IP20</td> </tr> <tr> <td>Failsafe mode</td> <td></td> <td>Specific version with line cut-off in case of removal plug-in module</td> </tr> <tr> <td>With line cut-off in case of removal plug-in module</td> <td></td> <td>Yes</td> </tr> <tr> <td>Disconnection indicator</td> <td></td> <td>Red light on</td> </tr> <tr> <td>Spare module(s)</td> <td></td> <td>DLAWTS1M-12D3</td> </tr> <tr> <td>Remote signaling of disconnection</td> <td></td> <td>Trough control module</td> </tr> <tr> <td>Dimensions</td> <td></td> <td>See diagram</td> </tr> <tr> <td>Weight</td> <td></td> <td>0.065 kg</td> </tr> </table>		Technology		GDT+Clamping diode+PTC (thermal resistor) + Resistor	SPD configuration		1-pair+shielded	Connection to Network		By screw terminal: cross section 0.5-2.5mm ²	Format		Plug-in DIN box	Mounting		Symmetrical rail 35 mm (EN 60715)	Housing material		Thermoplastic UL94 V-0	Operating temperature	Tu	-40/+85°C	Protection rating		IP20	Failsafe mode		Specific version with line cut-off in case of removal plug-in module	With line cut-off in case of removal plug-in module		Yes	Disconnection indicator		Red light on	Spare module(s)		DLAWTS1M-12D3	Remote signaling of disconnection		Trough control module	Dimensions		See diagram	Weight		0.065 kg									
Technology		GDT+Clamping diode+PTC (thermal resistor) + Resistor																																																						
SPD configuration		1-pair+shielded																																																						
Connection to Network		By screw terminal: cross section 0.5-2.5mm ²																																																						
Format		Plug-in DIN box																																																						
Mounting		Symmetrical rail 35 mm (EN 60715)																																																						
Housing material		Thermoplastic UL94 V-0																																																						
Operating temperature	Tu	-40/+85°C																																																						
Protection rating		IP20																																																						
Failsafe mode		Specific version with line cut-off in case of removal plug-in module																																																						
With line cut-off in case of removal plug-in module		Yes																																																						
Disconnection indicator		Red light on																																																						
Spare module(s)		DLAWTS1M-12D3																																																						
Remote signaling of disconnection		Trough control module																																																						
Dimensions		See diagram																																																						
Weight		0.065 kg																																																						
	Standards																																																							
	<table border="1"> <tr> <td>Standards compliance</td> <td></td> <td>IEC 61643-21 / EN 61643-21 / UL497B</td> </tr> </table>		Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B																																																			
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B																																																						
	Part number																																																							
	<table border="1"> <tr> <td>6421021</td> <td></td> <td></td> </tr> </table>		6421021																																																					
6421021																																																								

