





# CITEL

## 1-pair DIN rail plug-in Data surge protector

### DLATS1-06D3

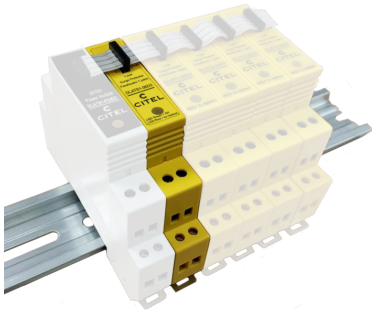

- ✦ 1-pair data line/telecom surge protection
- ✦ Local and Remote signaling of SPD status
- ✦ DIN rail mounting, Screw connect status
- ✦ Plug-in module
- ✦ 1 monitoring module + SPD modules (up to 48) + bus
- ✦ Discharge current  $I_{max}/I_n$ : 20 kA / 5kA
- ✦ Complies with IEC/EN 61643-21 and UL497B

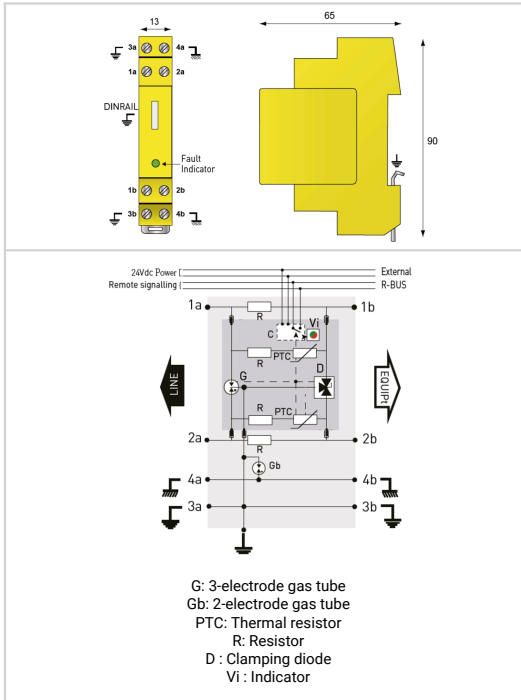

Electrical Characteristics		
Network		RS422
Nominal line voltage	$U_n$	6 V
Max. DC operating voltage	$U_c$	8 Vdc
Max. frequency	$f_{max}$	> 3 MHz
Insertion loss		< 1 dB
Max. load current @25°C	$I_L$	300 mA
Max. discharge current max. withstand @ 8/20 $\mu$ s by pole	$I_{max}$	20 kA
Protection mode(s)		Common/Differential mode
Protection Level C3 (10/1000 $\mu$ s), 300 applications@10 A, X-X (Line/Line)	Up	20 V
Protection level C3 (10/1000 $\mu$ s), 300 applications@10 A, X-C (Line/Earth)	Up	20 V
Impulse current 2 x 10/350 $\mu$ s Test - D1 Category	$I_{imp}$	5 kA
Nominal discharge current C2 Category	$I_n$	5 kA
Line/Line Nominal discharge current C2 Category	$I_n L/L$	5 kA
Nominal Discharge Current, X-C (Line/Earth) 8/20 $\mu$ s Test x 10 - C2 Category	$I_n L/PE$	5 kA
Line resistance ( $\pm$ 10%)		4.7 Ohm
Mechanical Characteristics		
Technology		GDT+Clamping diode+PTC (thermal resistor) + Resistor
SPD configuration		1-pair+shielded
Connection to Network		By screw terminal: cross section 0.5-2.5mm <sup>2</sup>
Format		Plug-in DIN box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	$T_u$	-40/+85°C
Protection rating		IP20
Failsafe mode		Transmission cut-off - fault mode 2 (short circuit)
Disconnection indicator		Red light on
Spare module(s)		DLATS1M-06D3
Remote signaling of disconnection		Trough control module
Remote signaling of disconnection via control module		With attached separated module
Connection bus		SPD connection/control module by bus: bus 1+4 (1control module+4 SPD), bus 1+9, bus 1+24 and bus 1+48
Dimensions		See diagram
Weight		0.067 kg
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B
Part number		
6417011		

