




CITEL

Support for E280 plug-in modules

MMP



- Connector strip for 2 x E280
- Max. number of pairs : 4

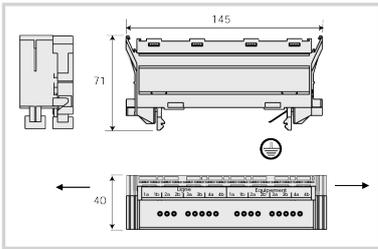

Electrical Characteristics		
Network		Low current
Max. frequency	f max.	20 MHz
Insertion loss		< 1 dB
Max. load current @25°C	IL	5 A
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	I _{max}	10 kA
Nominal discharge current <i>C2 Category</i>	I _n	5 kA
Impulse current <i>2 x 10/350 μs Test - D1 Category</i>	I _{imp}	2.5 kA
Mechanical Characteristics		
SPD configuration		4 pairs
Connection to Network		Earth pin
Format		Strip
Mounting		MDF
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Connection		connector CAD
Max. number of E280s		2.0000
Max. number of pairs		4.0000
Dimensions		See diagram
Weight		0.12 kg
Part number		
71480		

