




# CITEL

## 1-pair monobloc Telecom surge protector

### DLC-48D2



- High speed data transmission
- Common mode and differential mode protection
- Data lines, including those isolated from Earth
- Compact DIN rail enclosure, high density protection
- Protection of shield wire
- Location and test categories: D1, C2, C3
- IEC 61643-21 compliance

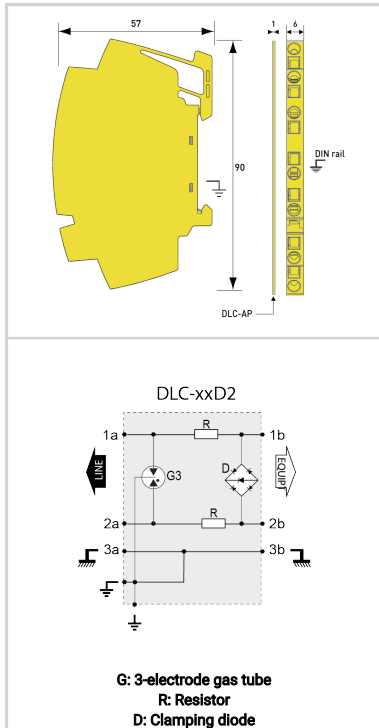

#### Electrical Characteristics

Network		Floating applications, E.g: 4-20mA or 48 V line
Nominal line voltage	Un	48 Vdc
Max. DC operating voltage	Uc	53 Vdc
Cut-off frequency -3dB, 100 ohm system	f max.	> 110 MHz
Cut-off frequency -1dB, 100 ohm system	f max.	> 60 MHz
Insertion loss		< 1 dB
Max. load current @25°C	IL	750 mA
Max. discharge current max. withstand @ 8/20 μs by pole	Imax	20 kA
Nominal Discharge Current C2 (1.2/50μs / 8/20μs), 10 applications, X-X (Line/Line)	In	10 kA
Nominal discharge current C2 (1.2/50μs / 8/20μs), 10 applications X-C (Line/Earth)	In	10 kA
Protection Level C3 (10/1000μs), 300 applications@10 A, Y-Y (Line/Line)	Up	80 V
Protection Level C3 (10/1000μs), 300 applications@10 A, Y-C (Line/Earth)	Up	650 V
Impulse current D1 (10/350μs), 2 applications, X-C (Line/Earth)	limp	2.0 kA
Line resistance (± 10%)		1.2 Ohm

#### Mechanical Characteristics

Technology		GDT+TVS diode
SPD configuration		1-pair+shielded
Connection to Network		By spring terminal - max. cross section 2.5mm <sup>2</sup> / AWG 13 (solid or stranded)
Format		DIN enclosure
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Ingress Protection rating		IP20 (NEMA 2)
Failsafe mode		Short-circuit
Disconnection indicator		Transmission interrupt - default mode 2
Dimensions		See diagram
Weight		0.029 kg



# CITEL

## 1-pair monobloc Telecom surge protector

---

### DLC-48D2

Standards	
Standards compliance	IEC 61643-21 / EN 61643-21
Environmental standards	EU RoHS
Part number	
641184	

