




CITEL

Coaxial surge protector DC-3.5 GHz

P8AX25-NWSMA/FF



- RF coaxial surge protector
- 3.5 GHz
- 190W
- Connectors: N/SMA
- Low insertion loss
- Removale GDT
- DC-pass
- Bi-directional protection

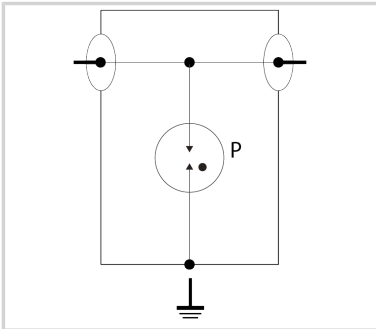

Electrical Characteristics

Max. DC operating voltage	Uc	200 Vdc
Frequency range	f	DC-3.5 GHz
Insertion loss		< 0.2 dB
Return loss		> 20 dB
Impedance		50 ohms
VSWR		<1.2:1
Max. load current @25°C	IL	10 A
Residual Current		
Leakage current to Ground	Ipe	None
Max. discharge current		
max. withstand @ 8/20 μs by pole	I _{max}	20 kA
Nominal discharge current		
C2 Category	I _n	5 kA
Protection mode(s)		Common mode
Protection level		
@1kV/μs (C3)	U _p	< 800 V
Impulse current		
2 x 10/350μs Test - D1 Category	I _{imp}	1 kA
Max Power		190 W
Typical let through energy		
(50 ohms) input 4kV 1.2/50μs - 2kA 8/20μs		350 μJ
DC Pass		Yes
Insulation resistance	IR	≥10 GOhms

Mechanical Characteristics

Technology		Gas discharge tube
Connection to Network		Connector N Female/SMA Female
Mounting		Bulkhead or Bracket
Housing material		Brass/Surface plating: Cu Zn Sn
Operating temperature	Tu	-40/+85°C
Relative Humidity		5 - 85%
Protection rating		IP65
Failsafe mode		Short-circuit
Disconnection indicator		Transmission interrupt
Spare module(s)		BBHF-250V
Dimensions		See diagram
Contacts		Bronze/Surface Au-Ag

Standards

Standards compliance		IEC 61643-21 / EN 61643-21 / UL497E
Environmental standards		EU RoHS
RohS compliance		Yes

Part number

610928



P8AX25-NWSMA/FF

