




# CITEL

## Type 2 AC surge protector + RFI filtering

### DS41HFS-230



- Type 2 AC surge protector
- RFI filtering integrated
- In : 20 kA
- I<sub>max</sub> : 40 kA
- Pluggable module
- Remote signaling option
- EN 61643-11, IEC 61643-11, UL1449 ed.5 compliance

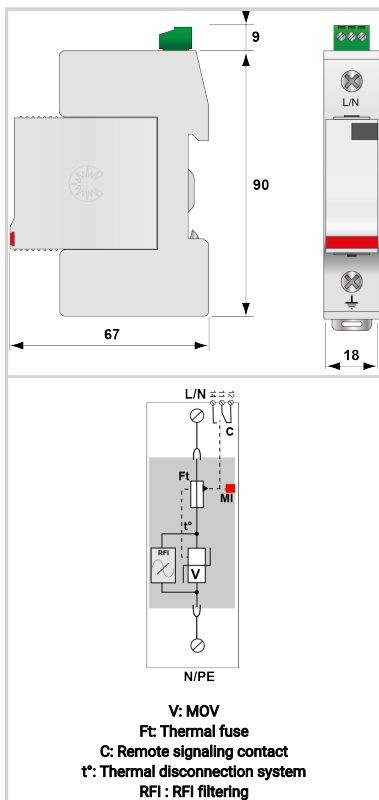

Electrical Characteristics		
SPD type	IEC	2
Network		230/400 V
Nominal line voltage	U <sub>n</sub>	230 Vac
Max. AC operating voltage	U <sub>c</sub>	255 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac disconnection
Follow current	I <sub>f</sub>	None
Nominal discharge current 15 x 8/20 μs impulses	I <sub>n</sub>	20 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I <sub>max</sub>	40 kA
RFI Filtering		0.1 - 30 MHz
Connection mode(s)		L/N or N/PE
Protection mode(s)		Common Mode or Differential Mode
Protection level @ I <sub>n</sub> (8/20 μs)	U <sub>p</sub>	1.25 kV
Residual voltage at 5 kA @ 5 kA (8/20 μs)	U <sub>p-5kA</sub>	1 kV
Max. capacitance	C	0,22 μF
Admissible short-circuit current	I <sub>sc</sub>	25 000 A
Mechanical Characteristics		
Technology		MOV+Filter
SPD configuration		Single phase
Connection to Network		By screw terminals: 2.5-25mm <sup>2</sup>
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T <sub>u</sub>	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator
Spare module(s)		DSM40HF-230
Remote signaling of disconnection		Output on changeover contact
Dimensions		See diagram
Weight		0.103 kg
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		Fuses type gG - 50 A
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		CSA
Part number		



CITEL

*Type 2 AC surge protector + RFI filtering*

---

**DS41HFS-230**

461590

---

