


DLA2-48DBC



- ✦ Din rail plug-in surge protector
- ✦ 2-pair
- ✦ Un: 48 V
- ✦ Shield wire protection
- ✦ Without line cut-off
- ✦ IEC 61643-21 compliance

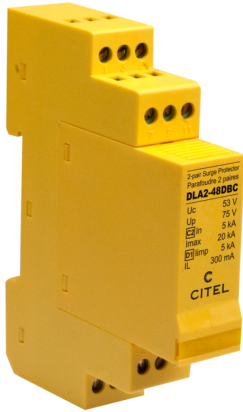

	Electrical Characteristics																																											
<p>G: 3-electrode gas tube Gb: 2-electrode gas tube R: Resistor D: Clamping diode</p>	<table border="1"> <tbody> <tr> <td>Network</td> <td></td> <td>Fipway, WorldFIP, FieldBus-h2</td> </tr> <tr> <td>Nominal line voltage</td> <td>Un</td> <td>48 V</td> </tr> <tr> <td>Max. DC operating voltage</td> <td>Uc</td> <td>53 Vdc</td> </tr> <tr> <td>Max. frequency</td> <td>f max.</td> <td>> 20 MHz</td> </tr> <tr> <td>Insertion loss</td> <td></td> <td>< 1 dB</td> </tr> <tr> <td>Max. load current @25°C</td> <td>IL</td> <td>300 mA</td> </tr> <tr> <td>Max. discharge current max. withstand @ 8/20 μs by pole</td> <td>Imax</td> <td>20 kA</td> </tr> <tr> <td>Line inductance (± 10 %)</td> <td></td> <td>non</td> </tr> <tr> <td>Protection Level C3 (10/1000μs), 300 applications@10 A, X-X (Line/Line)</td> <td>Up</td> <td>75 V</td> </tr> <tr> <td>Protection level C3 (10/1000μs), 300 applications@10 A, X-C (Line/Earth)</td> <td>Up</td> <td>75 V</td> </tr> <tr> <td>Max. capacitance</td> <td>C</td> <td>< 50 pF</td> </tr> <tr> <td>Impulse current 2 x 10/350μs Test - D1 Category</td> <td>Iimp</td> <td>5 kA</td> </tr> <tr> <td>Nominal discharge current C2 Category</td> <td>In</td> <td>5 kA</td> </tr> <tr> <td>Line resistance (± 10%)</td> <td></td> <td>4.7 Ohm</td> </tr> </tbody> </table>		Network		Fipway, WorldFIP, FieldBus-h2	Nominal line voltage	Un	48 V	Max. DC operating voltage	Uc	53 Vdc	Max. frequency	f max.	> 20 MHz	Insertion loss		< 1 dB	Max. load current @25°C	IL	300 mA	Max. discharge current max. withstand @ 8/20 μs by pole	Imax	20 kA	Line inductance (± 10 %)		non	Protection Level C3 (10/1000μs), 300 applications@10 A, X-X (Line/Line)	Up	75 V	Protection level C3 (10/1000μs), 300 applications@10 A, X-C (Line/Earth)	Up	75 V	Max. capacitance	C	< 50 pF	Impulse current 2 x 10/350μs Test - D1 Category	Iimp	5 kA	Nominal discharge current C2 Category	In	5 kA	Line resistance (± 10%)		4.7 Ohm
Network		Fipway, WorldFIP, FieldBus-h2																																										
Nominal line voltage	Un	48 V																																										
Max. DC operating voltage	Uc	53 Vdc																																										
Max. frequency	f max.	> 20 MHz																																										
Insertion loss		< 1 dB																																										
Max. load current @25°C	IL	300 mA																																										
Max. discharge current max. withstand @ 8/20 μs by pole	Imax	20 kA																																										
Line inductance (± 10 %)		non																																										
Protection Level C3 (10/1000μs), 300 applications@10 A, X-X (Line/Line)	Up	75 V																																										
Protection level C3 (10/1000μs), 300 applications@10 A, X-C (Line/Earth)	Up	75 V																																										
Max. capacitance	C	< 50 pF																																										
Impulse current 2 x 10/350μs Test - D1 Category	Iimp	5 kA																																										
Nominal discharge current C2 Category	In	5 kA																																										
Line resistance (± 10%)		4.7 Ohm																																										
	Mechanical Characteristics																																											
	<table border="1"> <tbody> <tr> <td>Technology</td> <td></td> <td>GDT+TVS diode</td> </tr> <tr> <td>SPD configuration</td> <td></td> <td>2-pairs+shielded</td> </tr> <tr> <td>Connection to Network</td> <td></td> <td>By screw terminal: cross section 0.5-2.5mm²</td> </tr> <tr> <td>Format</td> <td></td> <td>Plug-in DIN box</td> </tr> <tr> <td>Mounting</td> <td></td> <td>Symmetrical rail 35 mm (EN 60715)</td> </tr> <tr> <td>Housing material</td> <td></td> <td>Thermoplastic UL94 V-0</td> </tr> <tr> <td>Operating and storage temperature</td> <td></td> <td>-40/+85°C</td> </tr> <tr> <td>Protection rating</td> <td></td> <td>IP20</td> </tr> <tr> <td>Failsafe mode</td> <td></td> <td>Short-circuit</td> </tr> <tr> <td>Disconnection indicator</td> <td></td> <td>Transmission interrupt - default mode 2</td> </tr> <tr> <td>Spare module(s)</td> <td></td> <td>DLA2M-48dBC</td> </tr> <tr> <td>Dimensions</td> <td></td> <td>See diagram</td> </tr> <tr> <td>Weight</td> <td></td> <td>0.089 kg</td> </tr> </tbody> </table>		Technology		GDT+TVS diode	SPD configuration		2-pairs+shielded	Connection to Network		By screw terminal: cross section 0.5-2.5mm ²	Format		Plug-in DIN box	Mounting		Symmetrical rail 35 mm (EN 60715)	Housing material		Thermoplastic UL94 V-0	Operating and storage temperature		-40/+85°C	Protection rating		IP20	Failsafe mode		Short-circuit	Disconnection indicator		Transmission interrupt - default mode 2	Spare module(s)		DLA2M-48dBC	Dimensions		See diagram	Weight		0.089 kg			
Technology		GDT+TVS diode																																										
SPD configuration		2-pairs+shielded																																										
Connection to Network		By screw terminal: cross section 0.5-2.5mm ²																																										
Format		Plug-in DIN box																																										
Mounting		Symmetrical rail 35 mm (EN 60715)																																										
Housing material		Thermoplastic UL94 V-0																																										
Operating and storage temperature		-40/+85°C																																										
Protection rating		IP20																																										
Failsafe mode		Short-circuit																																										
Disconnection indicator		Transmission interrupt - default mode 2																																										
Spare module(s)		DLA2M-48dBC																																										
Dimensions		See diagram																																										
Weight		0.089 kg																																										
	Standards																																											
	<table border="1"> <tbody> <tr> <td>Standards compliance</td> <td></td> <td>IEC 61643-21 / EN 61643-21</td> </tr> </tbody> </table>		Standards compliance		IEC 61643-21 / EN 61643-21																																							
Standards compliance		IEC 61643-21 / EN 61643-21																																										
	Part number																																											
	640314																																											