


PROTECTION KIT DAC1-13VGS-30-275

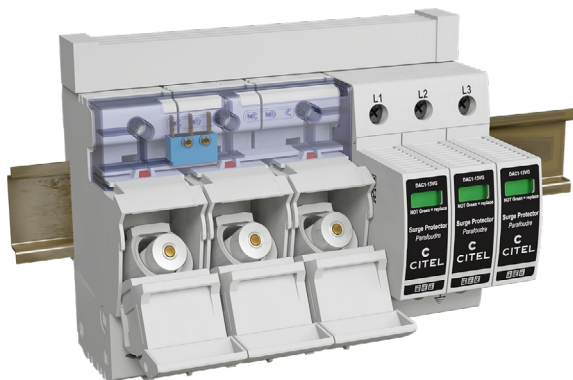

- Protection kit for AC networks
- Type 1+2+3
- 230/400 V 3-phase
- VG Technology (SPD)
- Pluggable module for each phase (SPD)
- Remote signaling
- Easy installation
- EN 61643-11, IEC 61643-11 certified (SPD)
- UL1449 ed.5 compliance (SPD)

KIT Part number	
DAC1-13VGS-30-275 + SFD1-13S-30 + BUSBAR P 3x2P 77	64200

Characteristics Type 1+2+3 AC SPD

CITEL Model		DAC1-13VGS-30-275
Max. AC operating voltage	Uc	275 Vac
Temporary Over Voltage (TOV) characteristic - 5 sec.	UT	580 Vac withstand
Temporary Over Voltage (TOV) characteristic - 120 mn	UT	770 Vac withstand
AC system		TNC
Residual current - Leakage current at U _c	I _{pe}	None
Nominal discharge current 15 x 8/20 μs impulses	I _n	20 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	50 kA
Impulse current by pole max. withstand 10/350 μs	I _{imp}	12.5 kA
Specific energy by pole	W/R	40 kJ/ohm
Withstand on Combination waveform Class III test	U _{oc}	6 kV
Protection level @ I _n 8/20 μs and 6 kV (1.2/50 μs)	U _p L/PE U _p N/PE	1.5 kV
Residual Voltage @ 5 kA (8/20 μs)	U _{p-5kA}	0,7 kV
Admissible short-circuit current	I _{sc} cr	50 000 A

Associated disconnectors



Thermal disconnector	Internal
Existing upstream ground fault breaker (if any)	Type «S» or delayed

Mechanical characteristics


Dimensions	see diagram - 3TE (EN43880)
Connection to Network	By screw terminals: 2.5-25 mm ² (35mm ² rigid)
Failsafe Mode	Disconnection from AC network
Disconnection indicator	1 mechanical indicator Green/Red by pole
Max. voltage/current for remote signaling	250 V/0.5 A (AC) / 30 V/3 A (DC)
Wiring for remote signaling	1.5 mm ² max.
Mounting	Symmetrical rail 35 mm (EN60715)
Operating temperature	-40/+85°C
Protection rating	IP20
Housing material	Thermoplastic UL94-V0
Spare unit	MDAC1-13VG-275

Standards

Compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	KEMA/ EAC

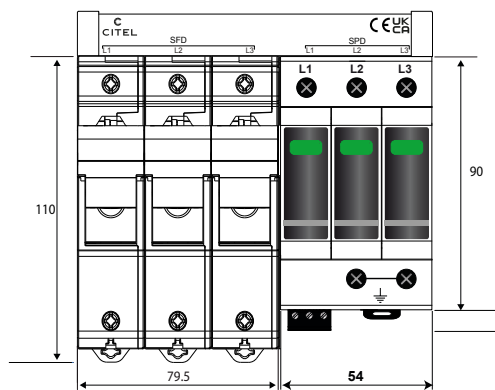

PROTECTION KIT DAC1-13VGS-30-275

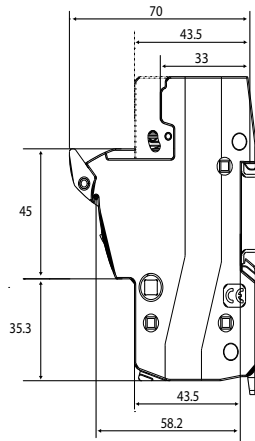

Characteristics Fuses + Holders

CITEL Model	SFD1-13S-30	
Max. AC operating voltage	Uc	500 Vac
Nominal discharge current <i>15 x 8/20 μs impulses</i>	In	50 kA
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	I _{max}	80 kA
Impulse current by pole <i>max. withstand 10/350μs</i>	I _{imp}	12.5 kA
Residual Voltage @ 12.5 kA	U _p	< 0.4 kV
Breaking capacity		100 000 A
Equivalent ratec AC current		Equivalent 125 A (gL/gG)
Mechanical characteristics		
Dimensions	see diagram	
Fuse configuration	Cylindrical 14 x51 mm	
Spare unit	SFD1-13	
Accessory provided	Fuses included	
Standards		
Compliance	EN 61643-11 /IEC 61643-11 / EN 60269-1/EN 60269-2/IEC 60269-1/IEC 60269-2	