

Support for E280 plug-in modules

BN16-V



- Metal enclosures for E280
- Max. number of pairs : 16

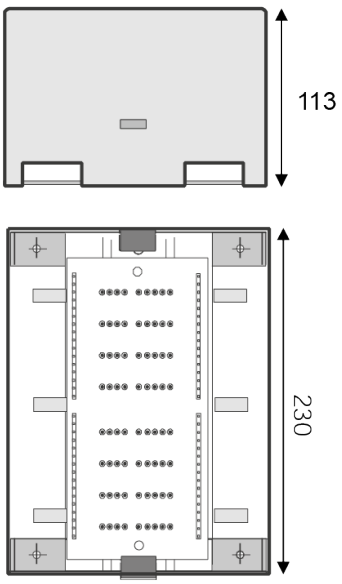

Electrical Characteristics		
Network		Low current
Max. frequency	f max.	20 MHz
Insertion loss		< 1 dB
Max. load current @25°C	IL	10 A
Max. discharge current *max. withstand @ 8/20 µs by pole*	Imax	10 kA
Nominal discharge current *C2 Category*	In	5 kA
Impulse current *2 x 10/350µs Test - D1 Category*	Iimp	2.5 kA
Mechanical Characteristics		
SPD configuration		16 pairs max
Format		Metallic box
Mounting		Wall
Housing material		Metallic
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Connection		screw terminal - max. section 1,5 mm²
Max. number of E280s		8.0000
Max. number of pairs		16.0000
Dimensions		See diagram
Weight		1.55 kg
Part number		
71357		