

*Type 1+2 AC surge protector 3-phase*

# DAC1-13-30-150

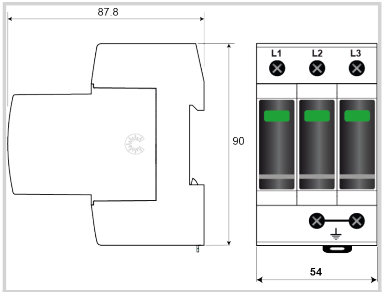


- Type 1 + 2 AC multipolar surge protector
- In: 20 kA
- Iimp: 12.5 kA
- Pluggable module for each phase
- Remote signaling (option)
- EN 61643-11, IEC 61643-11 certified
- UL1449 ed.5 compliance

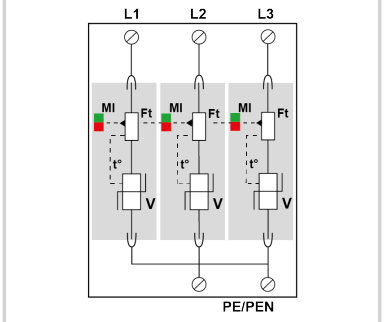


**V: High-energy varistor**
**Ft: Thermal fuse**
**t°: Thermal disconnection system**
**MI: Disconnection indicator**

| **Electrical Characteristics** | | |
|---|---|---|
| SPD type | IEC | 1+2 |
| Network | | 120/208 V |
| AC system | | TNC |
| Max. AC operating voltage | Uc | 150 Vac |
| Temporary Over Voltage (TOV) Characteristics - 5 sec.<br>*Without disconnection* | UT | 180 Vac withstand |
| Temporary Over Voltage (TOV) Characteristics - 120 mn<br>*Without disconnection or with safety disconnection* | UT | 230 Vac disconnection |
| Residual Current<br>*Leakage current to Ground* | Ipe | < 1 mA |
| Follow current | If | None |
| Nominal discharge current<br>*15 x 8/20 µs impulses* | In | 20 kA |
| Max. discharge current<br>*max. withstand @ 8/20 µs by pole* | Imax | 50 kA |
| Impulse current by pole<br>*max. withstand 10/350µs by pole* | Iimp | 12.5 kA |
| Impulse current N/PE<br>*max. withstand 10/350µs* | Iimp N /PE | 50 kA |
| Total lightning current<br>*max. total withstand @ 10/350µs* | Itotal | 37.5 kA |
| Specific energy by pole<br>*max. withstand 10/350 µs* | W/R | 40 kJ/ohm |
| Protection level L/PE<br>*@ In (8/20µs) and @ 6 kV (1,2/50 µs)* | L/PE | 1.2 kV |
| Residual voltage L/PE at 5 kA<br>*@ 5 kA (8/20µs)* | Up-5kA | 0.6 kV |
| Admissible short-circuit current | Isccr | 50 000 A |
| **Mechanical Characteristics** | | |
| Technology | | MOV |
| SPD configuration | | 3-phase |
| Connection to Network | | By screw terminals: 2.5-25mm² (35mm² rigid) |
| Format | | Plug-in modular box |
| Mounting | | Symmetrical rail 35 mm (EN 60715) |
| Housing material | | Thermoplastic UL94 V-0 |
| Operating temperature | Tu | -40/+85°C |
| Protection rating | | IP20 |
| Failsafe mode | | Disconnection from AC network |
| Disconnection indicator | | 1 mechanical indicator by pole - Red/Green |
| Spare module(s) | | MDAC1-13-150 |
| Remote signaling of disconnection | | option DAC1-13S-30-150 : output on changeover contact |
| Dimensions | | See diagram - 3 TE (EN43880) |
| Weight | | 0.408 kg |
| **Disconnectors** | | |
| Thermal disconnector | | Internal |
| Installation ground fault breaker | | Type 'S' or delayed |
| Back-up protection device | | Fuse assembly: SFD1-13S-30 / or 125 A min. - 315 A max. - Fuses Type gG |
| **Standards** | | |
| Standards compliance | | IEC 61643-11 / EN 61643-11 / UL1449 ed.5 |
| Certification | | KEMA |
| **Part number** | | |
| **821710113** | | |