
Support for E280 plug-in modules

MMP



- Connector strip for 2 x E280
- Max. number of pairs : 4

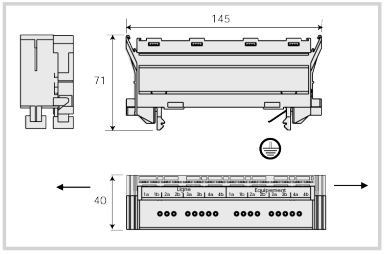

Electrical Characteristics		
Network		Low current
Max. frequency	f max.	20 MHz
Insertion loss		< 1 dB
Max. load current @25°C	IL	5 A
Max. discharge current *max. withstand @ 8/20 µs by pole*	Imax	10 kA
Nominal discharge current *C2 Category*	In	5 kA
Impulse current *2 x 10/350µs Test - D1 Category*	limp	2.5 kA
Mechanical Characteristics		
SPD configuration		4 pairs
Connection to Network		Earth pin
Format		Strip
Mounting		MDF
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Connection		connector CAD
Max. number of E280s		2.0000
Max. number of pairs		4.0000
Dimensions		See diagram
Weight		0.12 kg
Part number		
71480		