


Permanent & temporary overvoltages protector (POP)


DVM-230-16A

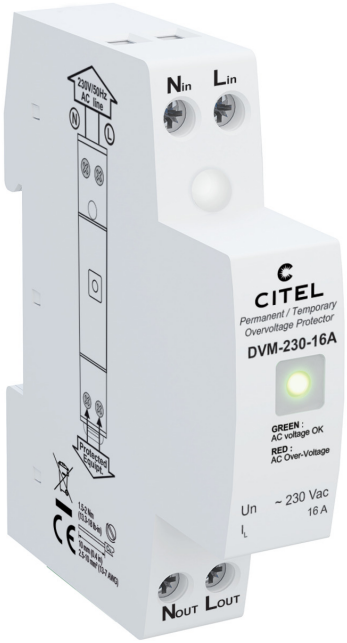

- Protection against temporary overvoltages
- Automatic delayed switch-off and switch-on again
- Status display (green, red)
- Easy installation on top-hat rail
- Complies with IEC 63052 standard

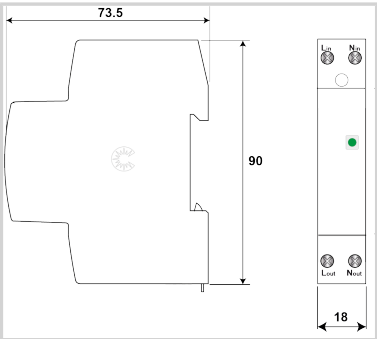

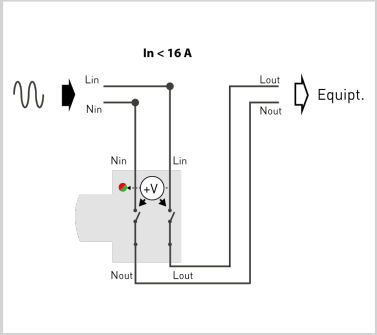

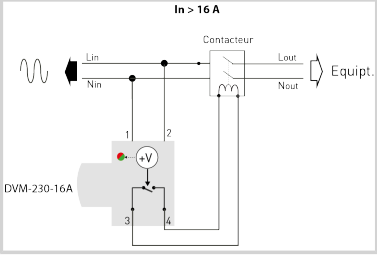

Electrical Characteristics		
Network		230/400V
Mechanical Characteristics		
Minimum disconnection during on AC voltage		3s @ 275 Vac / 1s @ 300 Vac / 0.25s @ 350 Vac / 0.07 @ 400 Vac
Connection to Network		By screw terminals: 1.5-10mm²
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Disconnection indicator		1 mechanical indicator - Red/Green
Dimensions		See diagram
Standards		
Standards compliance		IEC 63052
Part number		
3589015		