

Coaxial surge protector DC-3.5 GHz

P8AX09-N/FF/HE




- RF coaxial surge protector
- Harsh environment (HE)
- 3.5 GHz
- Connectors : N
- Low insertion loss
- Removale GDT
- DC-pass
- Bi-directional protection

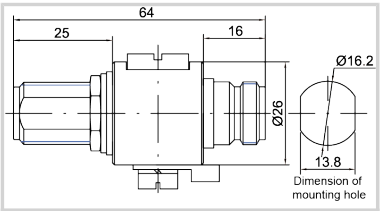


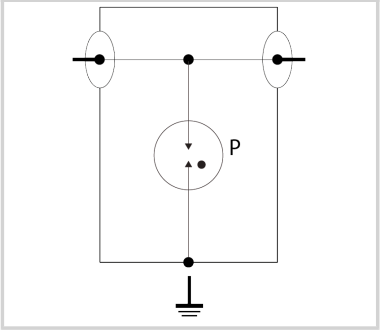

Electrical Characteristics		
Max. DC operating voltage	Uc	72 Vdc
Frequency range	f	DC-3.5 GHz
Insertion loss		< 0.2 dB
Return loss		> 20 dB
Impedance		50 ohms
VSWR		<1.2:1
Max. load current @25°C	IL	10 A
Residual Current *Leakage current to Ground*	Ipe	None
Max. discharge current *max. withstand @ 8/20 µs by pole*	Imax	20 kA
Nominal discharge current *C2 Category*	In	5 kA
Protection mode(s)		Common mode
Protection level *@1kV/µs (C3)*	Up	< 650 V
Impulse current *2 x 10/350µs Test - D1 Category*	Iimp	1 kA
Max RF Power		25 W
Typical let through energy *(50 ohms) input 4kV 1.2/50µs - 2kA 8/20µs*		300 µJ
DC Pass		Yes
Insulation resistance	IR	≥10 GOhms
Mechanical Characteristics		
Technology		Gas discharge tube
Connection to Network		Connector N Female/Female
Mounting		Bulkhead or Bracket
Housing material		Brass/Surface plating: Sn Ni
Operating temperature	Tu	-40/+85°C
Relative Humidity		5 - 85%
Protection rating		IP66
Failsafe mode		Short-circuit
Disconnection indicator		Transmision interrupt
Spare module(s)		BBHF-90V
Dimensions		See diagram
Contacts		Bronze/Surface Gold or Silver
Weight		0.135 kg
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497E
Environmental standards		EU RoHS
RohS compliance		Yes
Part number		
600114		

P8AX09-N/FF/HE

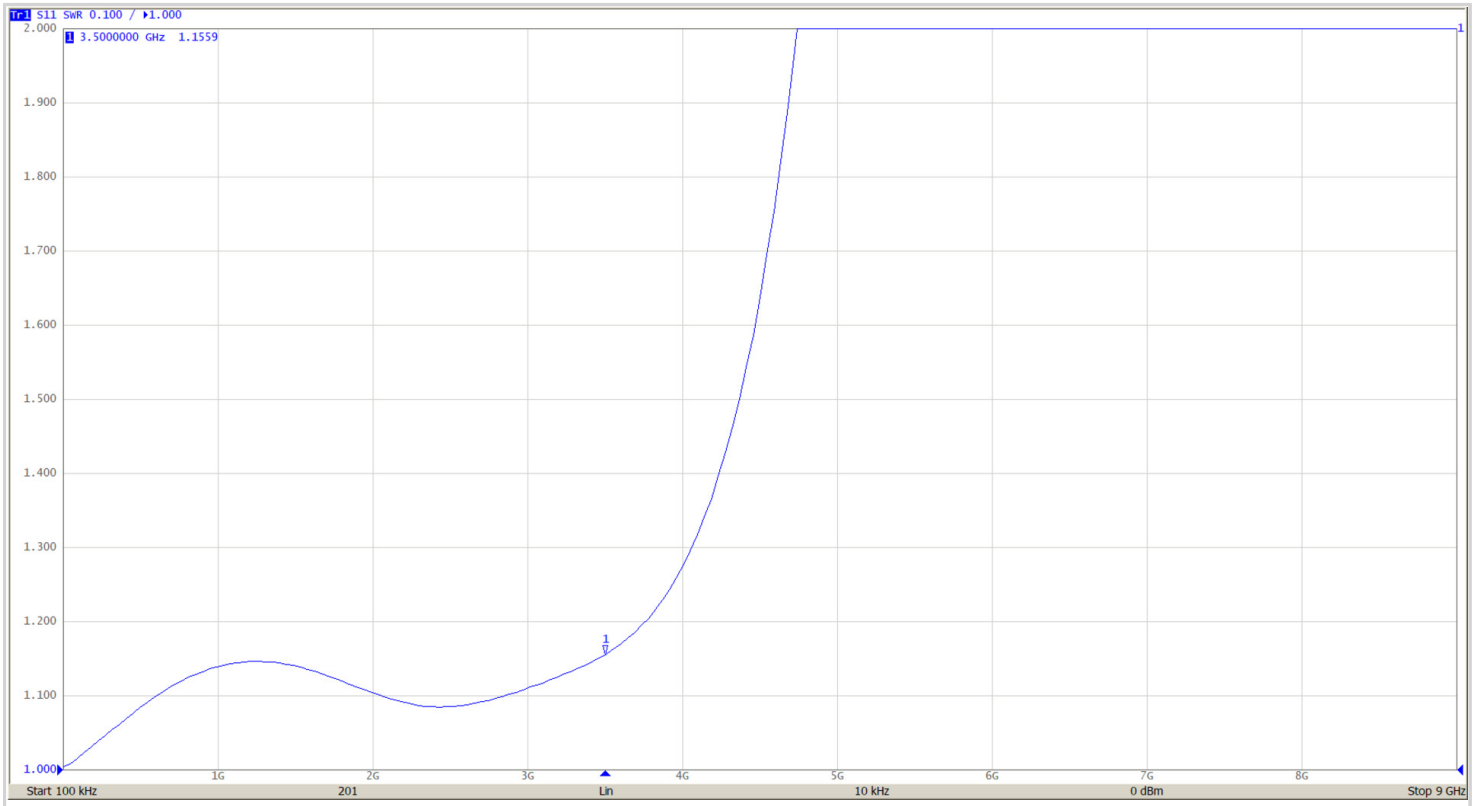

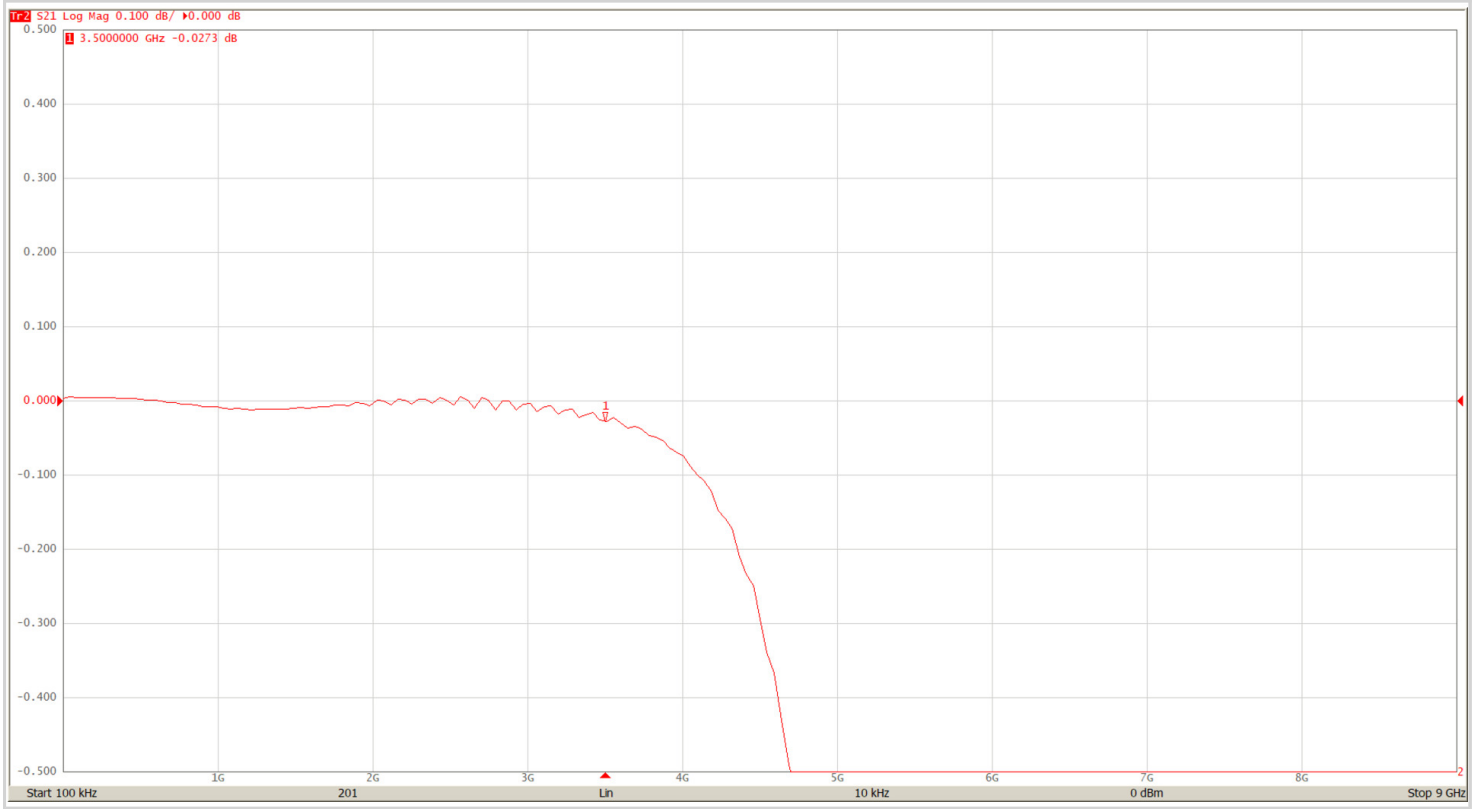

P8AX09-N/FF/HE

