


Permanent & temporary overvoltages protector (POP)

DVM-277-16A

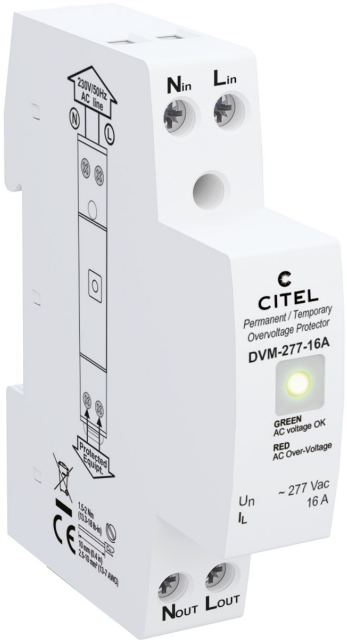

- Protection against permanent/temporary overvoltages of AC network
- For 277 Vac AC single-phase powerline
- Load current: up to 16 A
- Automatic operation: disconnection/reconnection
- Operating indicator
- installation on DIN rail

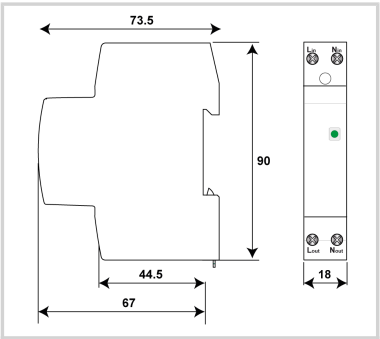

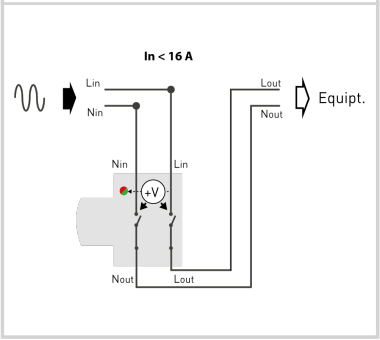

Electrical Characteristics		
Network		277 V single-phase
Mechanical Characteristics		
Minimum disconnection during on AC voltage		3s @ 320 Vac / 1s @ 336 Vac / 0.25s @ 368 Vac / 0.07 @ 400 Vac
Connection to Network		By screw terminals: 1.5-10mm²
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Disconnection indicator		1 mechanical indicator - Red/Green
Dimensions		See diagram
Standards		
Standards compliance		IEC 63052
Part number		
358913		