

DC power surge protector - 24 Vdc

DS220-24DC



- **Discover our latest innovation : the DDC20C-20-38**
- DC or PV power surge protector
- 24 Vdc
- Compact design
- Imax : 20 kA
- Pluggable module
- Remote signaling (option)
- Very low Up protection level

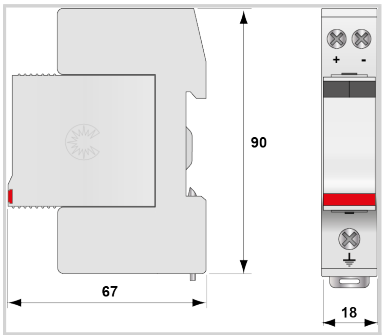

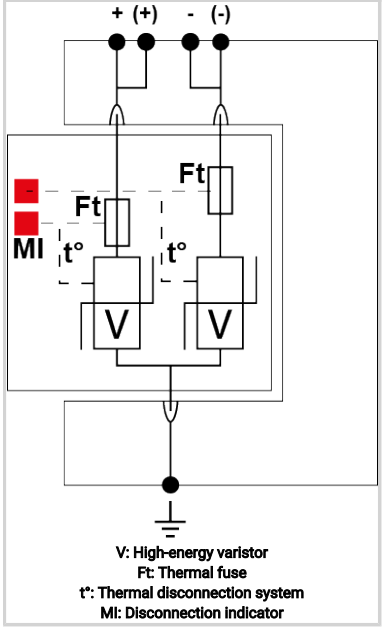

V: High-energy varistor
Ft: Thermal fuse
t°: Thermal disconnection system
MI: Disconnection indicator

Electrical Characteristics		
SPD type	IEC	2
Network		DC or PV network 24Vdc
Nominal DC voltage	Un-dc	24 Vdc
Nominal PV voltage	Uocstc	24 Vdc
Max. AC operating voltage	Uc	30 Vac
Max. PV operating voltage	Ucpv	38 Vdc
Max. DC operating voltage	Uc	38 Vdc
Max. load current @25°C	IL	50 A
Residual Current *Leakage current to Ground*	Ipe	< 0.2 mA
PV Permanent Operating current *Current consumption at Ucpv*	Icpv	< 0.1 mA
Follow current	If	None
Nominal discharge current *15 x 8/20 µs impulses*	In	10 kA
Max. discharge current *max. withstand @ 8/20 µs by pole*	Imax	20 kA
Total Maximum discharge current *max. total withstand @ 8/20 µs*	Imax Total	40 kA
Current withstand short circuit PV	Iscpv	1000 A
Connection mode(s)		+/-/PE
Protection mode(s)		Common mode
Protection level +/PE (-/PE) *@ In (8/20µs)*	Up	250 V
Mechanical Characteristics		
Technology		MOV
SPD configuration		2-poles
Connection to Network		By screw terminals: 1.5-10mm² (actives wires) and 2.5-25mm² (ground)
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from DC network
Disconnection indicator		2 mechanical indicators
Spare module(s)		DSM220-24DC
Remote signaling of disconnection		Option DS220S-24DC : output on changeover contact
Dimensions		See diagram
Weight		0.109 kg
Disconnectors		
Thermal disconnector		Internal
Back-up protection device		Fuses type gG - 20A
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		cRUus
Part number		

DS220-24DC

390501