



CITEL

SURGE PROTECTION FOR

- AC power line
- Photovoltaic system
- Led lighting
- High frequency coaxial line
- Telecom and dataline



CITEL

The global solutions provider



Since 1937, CITEL has been protecting installations around the world from transient overvoltages that result from switching events and lightning strikes.

Our teams all over the world are proud to help bring the market a comprehensive product range of surge protectors with our unique client-focused service & quality.



With a thorough understanding of local standards and regulations, along with continuous investment in R&D, CITEL designs, manufactures and sells millions of SPD's each year.

Unique, like each of our clients.

CITEL develops many critical protection components internally.

- Over 1 Billion Lines Protected
- Local support in over 200 countries
- High Current R&D Laboratories at your disposal



TRANSIENT OVERVOLTAGES

due to lightning

Today's increased reliance on very sensitive electronics and processes make surge protection an important discussion topic in order to avoid catastrophic business losses.

Mainly caused by lightnings, transient overvoltages (several kilovolts during a few microseconds) bring about important consequences in every network (AC, DC, Telecom, Data, RF). They may create disturbances, losses of data and even the full destruction of sensitive equipment.

Multiples risks

In addition to the excessive amplitude of transient overvoltages, multiple modes of aggression increase the risk of equipment failure in installations.

1. Direct Strike



2. Earth Potential rise



3. Strike on overhead lines



4. Coupling



SURGE PROTECTORS

The only effective protection

The goal is to limit the overvoltages to a level in compliance with the electrical withstand of the terminal equipment to be protected.


The SPD has to :

- provide the lowest residual voltage as possible,
- provide a discharge capacity adapted to the real risks,
- avoid disturbances of operation for the equipment.

These parameters will be reached by selecting the relevant surge protectors, as well as installing them in the correct way. Easy to use and efficient, CITEL surge protectors have been designed following the main international standards.

All networks are concerned

CITEL provides a wide range of surge protectors adapted to every network: AC power , DC power, Telecom, Data and RF .

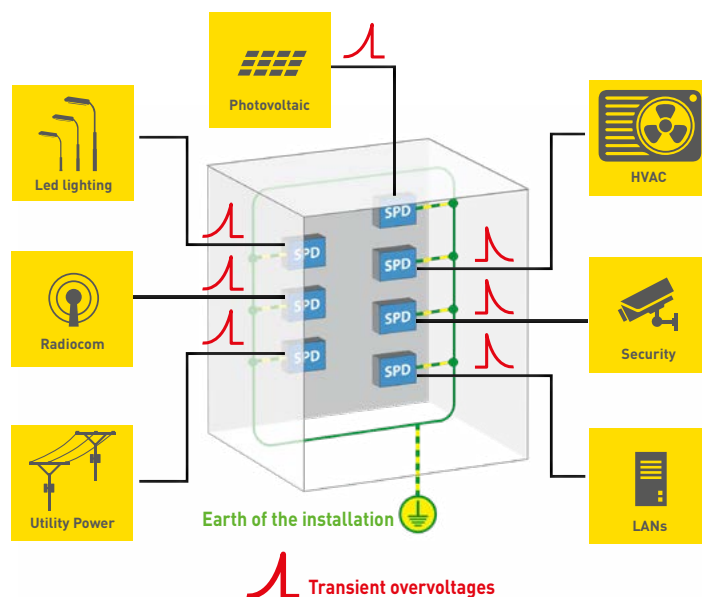



AC SURGE PROTECTORS

DAC Range

- ✓ New surge protectors range: DAC
- ✓ Full range of AC Surge Protection Type 1 and Type 2
- ✓ In compliance with EN and IEC standards
- ✓ Pluggable version / DIN Rail mounting design
- ✓ Discharge current : $I_{max} > 140 \text{ kA}$ - $I_{limp} > 25 \text{ kA}$
- ✓ Different operating voltages
- ✓ Safety thermal disconnection and remote signalling
- ✓ Available in VG Technology

DAC surge protectors are based on MOV or MOV+GSG technology (patented "VG" technology) which are the best combination to provide high discharge current capability and low residual voltage. The Type 1 versions have been designed to improve safety in low voltage networks by avoiding follow currents.




DAC50S



DAC1-13VGS



DACN1-25CVGS/SC

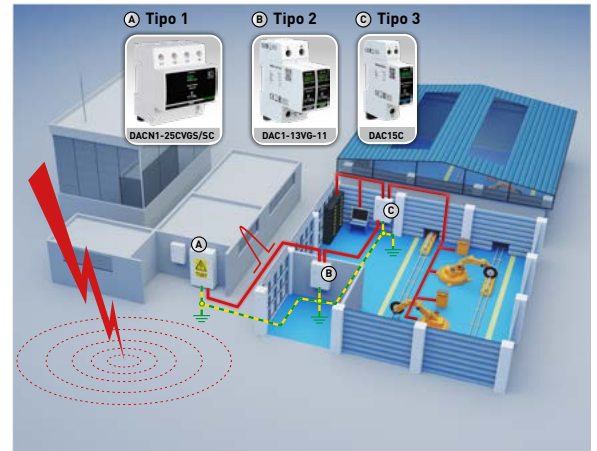


Series	Type	I_{max}	I_{limp}	Specificity
DACN1-25CVGS/SC	1+2+3	-	25 kA	High energy
DAC1-13S	1+2	-	12,5 kA	Pluggable
DS80S	2	80 kA	-	Type 2 reinforced
DAC50S	2	50 kA	-	Type 2 standard
DAC40CS 1-phase	2	40 kA	-	Single phase Compact
DAC15CS 3-phase	2	15 kA	-	3-phase Compact

SURGE PROTECTORS FOR PHOTOVOLTAIC SYSTEM

DPVN / DS60VGPV range

- ✓ Complete range for photovoltaic installation
- ✓ Type 1 and Type 2 PV surge protectors
- ✓ Available voltages : 500, 600, 800, 1000 and 1500 Vdc
- ✓ Safety disconnection and remote signalling
- ✓ CTC Technology (DPVN) : Central Thermal Control
- ✓ IEC 61643-31 compliance

DPVN surge protectors have been designed to protect efficiently the PV inverters and operate safely on the PV networks. They are available in Type 1 and Type 2, and for all the main DC voltages.

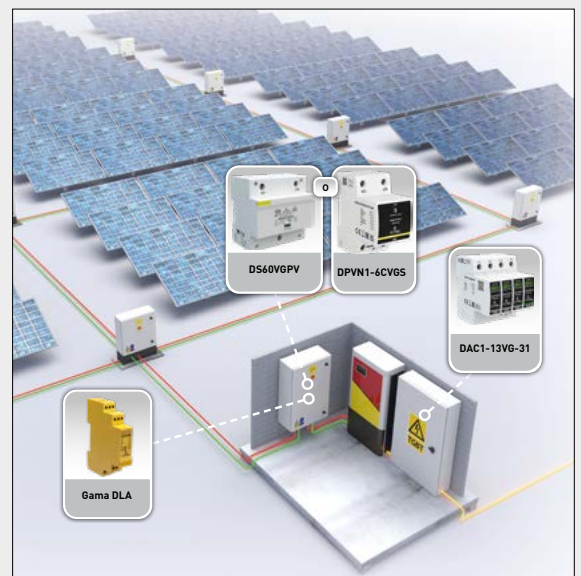

DS60VGPV
Type 1+2 SPD
25 kA Itotal



DPVN1-6CVGS
Type 1+2 SPD
12.5 kA Itotal



DPVN40CS
Type 2 SPD
40 kA I_{max}

LED LIGHTING SURGE PROTECTORS

- ✓ Configurations Class I and Class II
- ✓ Compact dimensions
- ✓ IP20 and IP65 versions
- ✓ Combined AC / Data version
- ✓ Connection: wire or screw or spring contact
- ✓ Maximal discharge current 10 kA
- ✓ Remote signalling (option)
- ✓ IEC 61643-11 and EN 61643-11 compliance



CITEL offers a full range of surge protectors designed to be installed at different points on the lighting network such as streetlights, the base of poles and street cabinets. For every type of outdoor LED lighting systems: urban, architectural, tunnels etc...



TELECOM/DATA SURGE PROTECTORS

A comprehensive range of surge protectors for the most common of transmission lines.

- ✓ Very short response time (less than 1 ns)
- ✓ Gas tube for high discharge current capability
- ✓ Fail safe behaviour in case of permanent failure
- ✓ Mounting: on telecom MDF, wall, DIN Rail
- ✓ Telecom Applications: PSTN, ISDN, ADSL, VDSL, HDSL
- ✓ Data Applications: RS485, RS422, 0-20mA, Profibus....
- ✓ IEC/EN 61643-21 compliance
- ✓ Signalisation and Remote signalling version

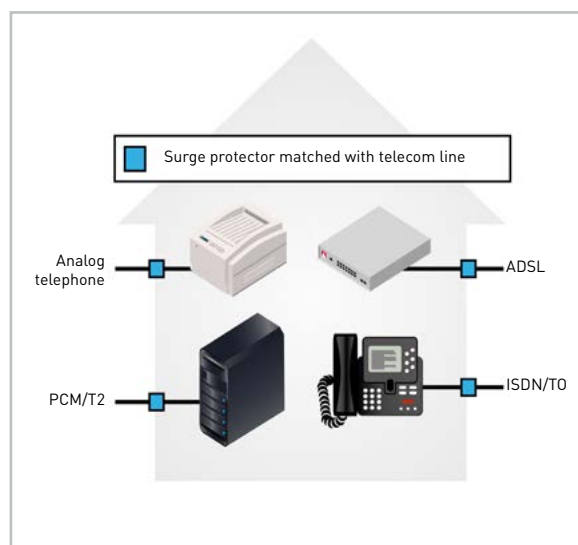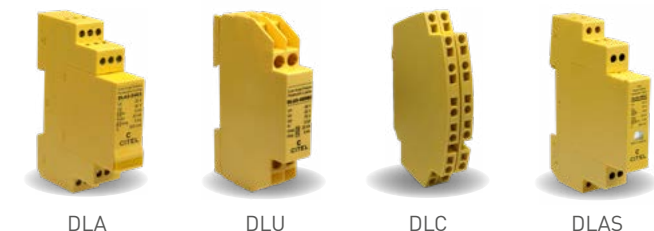


DATALINE SURGE PROTECTORS

- ✓ Very short response time (less than 1 ns)
- ✓ Gas tube for high discharge current capability
- ✓ Low voltage line and high bitrate (up to 10 Gbit/s)
- ✓ Connectors : RJ45, Coaxial...
- ✓ Applications : Ethernet Cat 5E, Cat 6A, PoE++ ...

Ethernet network surge protectors are designed for computer networks with very fast data transfer speeds up to 10 Gbit/s for the Category 6 networks. Several models are available to adapt to all the configurations of dataline installations.

These surge protectors are in compliance with EN 61643-21 standard.

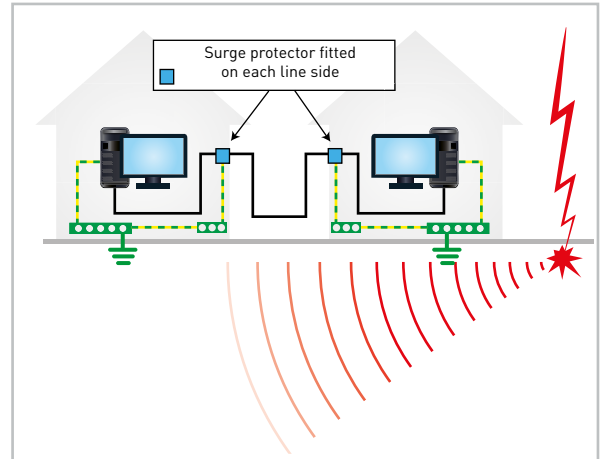

MJ8-POE-C6A
Indoor POE SPD



CRMJ8-POE-C6A
Outdoor POE SPD



MSP-VM
3-way survey camera



CXC
Video coaxial SPD



DD9
Multi-port Ethernet



PL
POE rack mounted SPD



RF SURGE PROTECTORS

Citel offers several surge protection technologies for RF lines :



"Quarter Wave":
PRC series

- ✓ "Filtering" operation
- ✓ 0,5 up to 6 GHz
- ✓ I_{max} : 100 kA
- ✓ Residual voltage : a few volts
- ✓ No DC power on coaxial cable
- ✓ No ageing



"Gas Tube":
P8AX series

- ✓ "Sparkover" operation
- ✓ DC up to 6 GHz
- ✓ I_{max} : 20 kA
- ✓ Residual voltage < 300 V
- ✓ Removable GDT for optimized maintenance



"Gas Tube + Diode":
CX series

- ✓ 2 diagrams : Gas discharge Tube (CXP) or GDT + Diodes (CXC)
- ✓ Very low insertion loss
- ✓ Bandwidth up to 1000 MHz
- ✓ I_{max} : 10 kA (8/20µs)
- ✓ Applications : Security cameras /CATV /RF receivers
- ✓ DC Block series available

France

Head office

Sales department

Paris

Tel. : +33 1 41 23 50 23

e-mail : contact@citel.fr

Web : www.citel.fr

Factory

Reims

Tel. : +33 3 26 85 74 00

Germany

Bochum

Tel. : +49 2327 6057 0

e-mail : info@citel.de

Web : www.citel.de

USA

Miramar

Tel : (954) 430 6310

e-mail : info@citel.us

Web site : www.citel.us

China

Sales department

Shanghai

Tel. : +86 21 58 12 25 25

e-mail : info@citel.cn

Web : www.citel.cn

Factory

Tel. : +86 21 58 12 80 67

India

New Delhi

Tel. : +91 11 2626 12 38

e-mail : indiacitel@gmail.com

Web : www.citel.in

Thailand

Bangkok

Tel. : +66 (0) 2 104 9214

Web : www.citel.fr

UAE

Dubai

e-mail: info@citel.ae

Web : www.citel.fr

