




CITEL DS44-480



- Type 2 AC Multipolar surge protector
- I_n : 20 kA
- I_{max} total : 160 kA
- Pluggable module for each phase
- Remote signaling option
- NF EN 61643-11, IEC 61643-11 compliance
- UL1449 ed.5

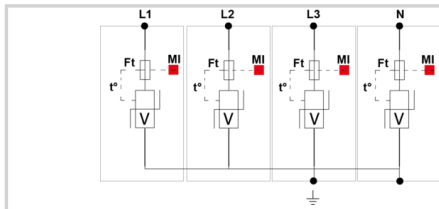

Electrical Characteristics	
SPD type	2
Network	277/480 V 3-phase+N
AC system	TNS-IT
Nominal line voltage	U_n 480 Vac
Max. AC operating voltage	U_c 530 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 700 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 920 Vac disconnection
Residual Current Leakage current to Ground	I_{pe} < 2 mA
Follow current	I_f None
Nominal discharge current 15 x 8/20 μ s impulses	I_n 20 kA
Max. discharge current max. withstand @ 8/20 μ s by pole	I_{max} 40 kA
Total Maximum discharge current max. total withstand @ 8/20 μ s	I_{max} Total 160 kA
Connection mode(s)	L/PE and N/PE
Protection mode(s)	Common mode/Differential mode
Protection level @ I_n (8/20 μ s)	U_p 2.5 kV
Admissible short-circuit current	I_{scrr} 25 000 A
Mechanical Characteristics	
Technology	MOV
SPD configuration	3-phase+Neutral
Connection to Network	By screw terminals: 2.5-25mm ² / by bus
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	T_u -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	1 mechanical indicator by pole
Spare module(s)	DSM40-480
Remote signaling of disconnection	option: DS44S-480 - output on changeover contact
Weight	0.399 kg
Disconnectors	
Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Fuses	Fuses type gG - 50 A
Standards	
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	UL / CSA / EAC
Part number	
461006	

