




- Protection against over-under voltage of AC network
- Automatic operation
- Re-engagement delayed
- Operating indicators
- Easy installation on DIN rail
- EN 50550 compliance

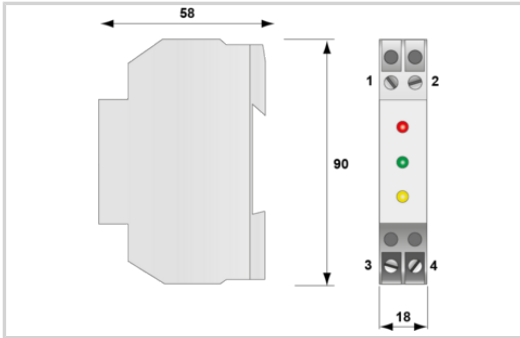

| Electrical Characteristics | |
|-----------------------------|--|
| Network | 120 V single-phase |
| Mechanical Characteristics | |
| Disconnection | Undervoltage: < 95 Vac Overvoltage:> 140 Vac Disconnection delay: 1 second Reset time: 1 second |
| Format | DIN Box 1 module of 18 mm |
| Voltage/operating indicator | Yellow LED: undervoltage (disconnection) Green LED: Correct voltage Red LED: overvoltage (disconnection) |
| Weight | 0.056 kg |
| Standards | |
| Standards compliance | EN 50550 |
| Certification | |
| Part number | |
| 3569012 | |