




Type 1+2 AC surge protector - 1-pole

CITEL

DS250E-300



- ↳ Type 1 + 2 unipolar surge protector
- ↳ Iimp: 25 kA on 10/350µs impulse
- ↳ Imax: 140 kA on 8/20µs impulse
- ↳ Internal disconnections, status indicators
- ↳ Remote signaling
- ↳ IEC 61643-11, EN 61643-11 and UL1449 ed.5 compliance

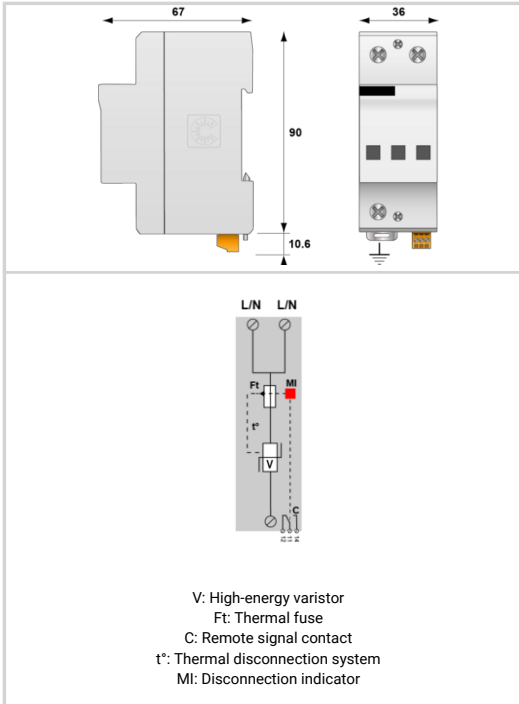

Electrical Characteristics	
SPD type	1+2
Network	230/400 V
Max. AC operating voltage	Uc 330 Vac
Max. load current <i>if series connection</i>	IL 100 A
Temporary Over Voltage (TOV) Characteristics - 5 sec. <i>Without disconnection</i>	UT 335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn <i>Without disconnection or with safety disconnection</i>	UT 440 Vac disconnection
Residual Current <i>Leakage current to Ground</i>	Ipe < 3 mA
Follow current	If None
Nominal discharge current <i>15 x 8/20 µs impulses</i>	In 70 kA
Max. discharge current <i>max. withstand @ 8/20 µs by pole</i>	Imax 140 kA
Impulse current by pole <i>max. withstand 10/350µs by pole</i>	Iimp 25 kA
Specific energy by pole <i>max. withstand 10/350 µs</i>	W/R 156 kJ/ohm
Connection mode(s)	L/N or L/PE
Protection mode(s)	Common Mode or Differential Mode
Protection level <i>@ In (8/20µs)</i>	Up 2.5 kV
Residual voltage at 5 kA <i>@ 5 kA (8/20µs)</i>	Up-5kA 1 kV
Admissible short-circuit current	Iscrc 50 000 A
Mechanical Characteristics	
Technology	MOV
SPD configuration	Single phase
Connection to Network	By screw terminals: 6-35mm ² / by bus
Format	1-pole modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	3 mechanical indicators
Remote signaling of disconnection	Output on changeover contact
Dimensions	See diagram
Weight	0.32 kg
Disconnectors	
Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Back-up protection device	Fuses type gG - 315 A
Standards	
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	
Part number	
2730	

