




CITEL

Ultra Compact Type 2+3 hard wired surge protector for class II

MLPX2-275LN-W

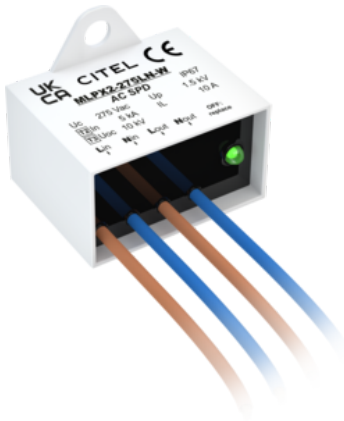

- Ultra compact Type 2+3 hard wired surge protectors
- Lin/Nin and Lout/Nout
- Wall mounting and hard wired connection
- Bracket breakable
- Protection rating : IP67
- Disconnection signaling by indicator
- AC disconnection in case of end of life
- EN 61643-11, IEC 61643-11 and UL1449 5ed. compliance



	Electrical Characteristics																																																							
<p>V: Varistor Ft: Thermal fuse LED: Disconnection indicator t°: Thermal disconnection system</p>	<table border="1"> <tr><td>SPD type</td><td></td><td>2+3</td></tr> <tr><td>Network</td><td></td><td>230-277 V Single-phase</td></tr> <tr><td>AC system</td><td></td><td>TT-TN</td></tr> <tr><td>Nominal line voltage</td><td>Un</td><td>230 V</td></tr> <tr><td>Max. AC operating voltage</td><td>Uc</td><td>275 Vac</td></tr> <tr><td>Max. load current @25°C</td><td>IL</td><td>10 A</td></tr> <tr><td>Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection</td><td>UT</td><td>335 Vac withstand</td></tr> <tr><td>Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection</td><td>UT</td><td>440 Vac disconnection</td></tr> <tr><td>Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection</td><td>UT</td><td>1200 V/300A/200 ms disconnection</td></tr> <tr><td>Residual Current Leakage current to Ground</td><td>Ipe</td><td>None</td></tr> <tr><td>Nominal discharge current 15 x 8/20 μs impulses</td><td>In</td><td>5 kA</td></tr> <tr><td>Max. discharge current max. withstand @ 8/20 μs by pole</td><td>Imax</td><td>10 kA</td></tr> <tr><td>Total Maximum discharge current max. total withstand @ 8/20 μs</td><td>Imax Total</td><td>20 kA</td></tr> <tr><td>Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs</td><td>Uoc</td><td>10 kV</td></tr> <tr><td>Withstand on overvoltages IEEE C62.41.1</td><td></td><td>10 kV / 10 kA</td></tr> <tr><td>Protection mode(s)</td><td></td><td>Differential Mode</td></tr> <tr><td>Protection level L/N @ In (8/20μs)</td><td>Up L/N</td><td>1.5 kV</td></tr> <tr><td>Admissible short-circuit current</td><td>Iscsr</td><td>10 000 A</td></tr> </table>		SPD type		2+3	Network		230-277 V Single-phase	AC system		TT-TN	Nominal line voltage	Un	230 V	Max. AC operating voltage	Uc	275 Vac	Max. load current @25°C	IL	10 A	Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand	Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac disconnection	Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection	UT	1200 V/300A/200 ms disconnection	Residual Current Leakage current to Ground	Ipe	None	Nominal discharge current 15 x 8/20 μs impulses	In	5 kA	Max. discharge current max. withstand @ 8/20 μs by pole	Imax	10 kA	Total Maximum discharge current max. total withstand @ 8/20 μs	Imax Total	20 kA	Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs	Uoc	10 kV	Withstand on overvoltages IEEE C62.41.1		10 kV / 10 kA	Protection mode(s)		Differential Mode	Protection level L/N @ In (8/20μs)	Up L/N	1.5 kV	Admissible short-circuit current	Iscsr	10 000 A
SPD type		2+3																																																						
Network		230-277 V Single-phase																																																						
AC system		TT-TN																																																						
Nominal line voltage	Un	230 V																																																						
Max. AC operating voltage	Uc	275 Vac																																																						
Max. load current @25°C	IL	10 A																																																						
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand																																																						
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac disconnection																																																						
Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection	UT	1200 V/300A/200 ms disconnection																																																						
Residual Current Leakage current to Ground	Ipe	None																																																						
Nominal discharge current 15 x 8/20 μs impulses	In	5 kA																																																						
Max. discharge current max. withstand @ 8/20 μs by pole	Imax	10 kA																																																						
Total Maximum discharge current max. total withstand @ 8/20 μs	Imax Total	20 kA																																																						
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs	Uoc	10 kV																																																						
Withstand on overvoltages IEEE C62.41.1		10 kV / 10 kA																																																						
Protection mode(s)		Differential Mode																																																						
Protection level L/N @ In (8/20μs)	Up L/N	1.5 kV																																																						
Admissible short-circuit current	Iscsr	10 000 A																																																						
	Mechanical Characteristics																																																							
	<table border="1"> <tr><td>Technology</td><td>MOV</td></tr> <tr><td>Connection to Network</td><td>By solid wires: 0.75mm²</td></tr> <tr><td>Mounting</td><td>Wall or plate</td></tr> <tr><td>Housing material</td><td>Thermoplastic UL94 V-0</td></tr> <tr><td>Operating temperature</td><td>Tu -40/+85°C</td></tr> <tr><td>Protection rating</td><td>IP67</td></tr> <tr><td>Failsafe mode</td><td>Disconnection and AC line cut-off</td></tr> <tr><td>Disconnection indicator</td><td>LED green OFF and AC network cut-off</td></tr> <tr><td>Voltage/operating indicator</td><td>Green Led ON</td></tr> <tr><td>Dimensions</td><td>See diagram</td></tr> <tr><td>Weight</td><td>0.040 kg</td></tr> </table>	Technology	MOV	Connection to Network	By solid wires: 0.75mm ²	Mounting	Wall or plate	Housing material	Thermoplastic UL94 V-0	Operating temperature	Tu -40/+85°C	Protection rating	IP67	Failsafe mode	Disconnection and AC line cut-off	Disconnection indicator	LED green OFF and AC network cut-off	Voltage/operating indicator	Green Led ON	Dimensions	See diagram	Weight	0.040 kg																																	
Technology	MOV																																																							
Connection to Network	By solid wires: 0.75mm ²																																																							
Mounting	Wall or plate																																																							
Housing material	Thermoplastic UL94 V-0																																																							
Operating temperature	Tu -40/+85°C																																																							
Protection rating	IP67																																																							
Failsafe mode	Disconnection and AC line cut-off																																																							
Disconnection indicator	LED green OFF and AC network cut-off																																																							
Voltage/operating indicator	Green Led ON																																																							
Dimensions	See diagram																																																							
Weight	0.040 kg																																																							
	Disconnectors																																																							
	Thermal disconnector	Internal																																																						
	Installation ground fault breaker	Type 'S' or delayed																																																						
	Standards																																																							
	Standards compliance IEC 61643-11 / EN 61643-11 / UL1449 ed.5																																																							
	Part number																																																							
	713567																																																							

