





## Type 1+2 PV surge protector

# CITEL

### DS50PV-1000G/12KT1

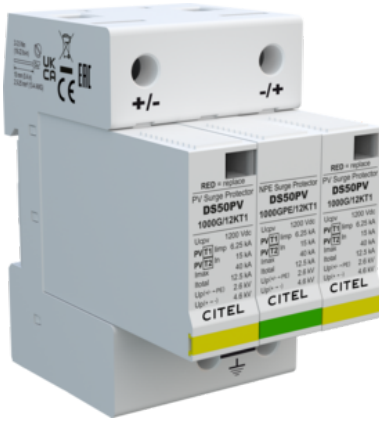

- ▶ Type 1+2 surge protector for Photovoltaic
- ▶ Impulse currents  $I_{imp}/I_{total}$  : 6.25/12.5 kA (10/350 $\mu$ s)
- ▶ Common/Differential mode protection
- ▶ Remote signaling (option)
- ▶ IEC 61643-31, EN 61643-31, EN 50539-11 and UL1449 ed.5 compliance

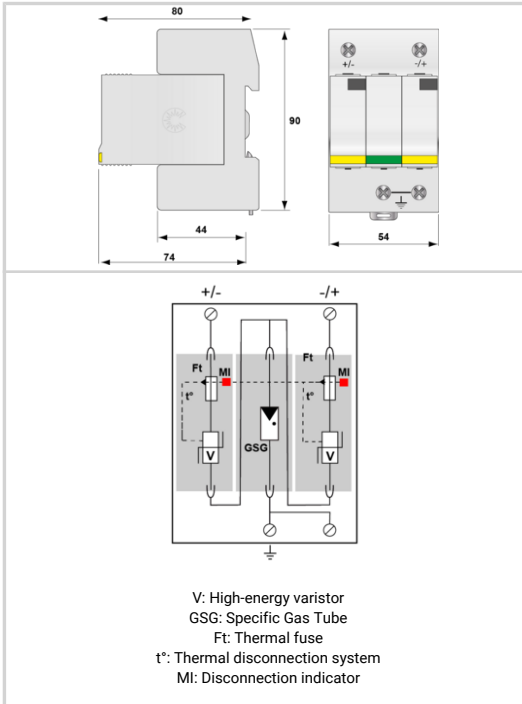

Electrical Characteristics		
SPD type	IEC	1+2
Network		PV network 1000 Vdc
Nominal PV voltage	Uocstc	1000 Vdc
Max. PV operating voltage	Ucpv	1200 Vdc
Residual Current Leakage current to Ground	Ipe	None
PV Permanent Operating current Current consumption at Ucpv	Icpv	< 0.1 mA
Follow current	If	None
Nominal discharge current 15 x 8/20 $\mu$ s impulses	In	15 kA
Max. discharge current max. withstand @ 8/20 $\mu$ s by pole	I <sub>max</sub>	40 kA
Total Maximum discharge current max. total withstand @ 8/20 $\mu$ s	I <sub>max</sub> Total	60 kA
Impulse current by pole max. withstand 10/350 $\mu$ s by pole	I <sub>imp</sub>	6.25 kA
Total lightning current max. total withstand @ 10/350 $\mu$ s	I <sub>total</sub>	12.5 kA
Current withstand short circuit PV	I <sub>scpv</sub>	15 000 A
Connection mode(s)		+/-/PE
Protection mode(s)		Common/Differential mode
Protection level +/- @ In (8/20 $\mu$ s)	Up	4.6 kV
Protection level +/-PE (-/PE) @ In (8/20 $\mu$ s)	Up	2.6 kV
Mechanical Characteristics		
Technology		MOV+GDT
Connection to Network		By screw terminals: 2.5-25mm <sup>2</sup>
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Disconnection indicator		2 mechanical indicators
Spare module(s)		DSM50PV-1000G/12KT1
Remote signaling of disconnection		Option DS50PVS-1000G/12KT1 - output on changeover contact
Dimensions		See diagram
Weight		0.39 kg
Disconnectors		
Thermal disconnector		Internal
Back-up protection device		Without
Standards		
Standards compliance		IEC 61643-31 / EN 61643-31 / EN 50539-11 / UL1449 ed.5
Certification		TUV
Part number		
482383		

