




Type 2 AC surge protector - 3-phase+N

CITEL

DAC50-31-320



- ▶ Type 2 AC surge protector
- ▶ In: 20 kA
- ▶ I_{max}: 50 kA
- ▶ Pluggable module for each phase
- ▶ Remote signaling option
- ▶ EN 61643-11, IEC 61643-11 and UL1449 ed.5 certified

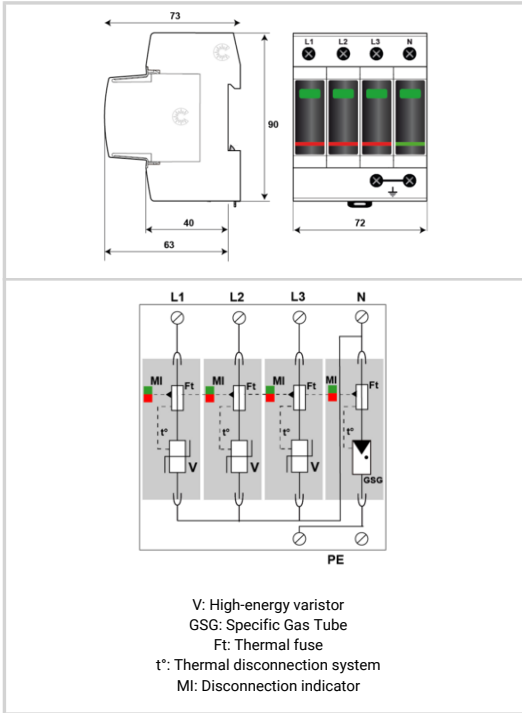

Electrical Characteristics	
SPD type	2
Network	230/400 V 3-phase+N
AC system	TT-TNS
Max. AC operating voltage	U _c 320 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 440 Vac disconnection
Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection	UT 1200 V/300A/200 ms withstand
Residual Current	I _{pe} None
Leakage current to Ground	I _f None
Follow current	I _f None
Nominal discharge current 15 x 8/20 μs impulses	I _n 20 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max} 50 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	I _{max} Total 50 kA
Protection mode(s)	L/N and N/PE
Protection level @ I _n (8/20μs) and @ 6 kV (1,2/50 μs)	U _p L/N 1.5 kV
Protection level N/PE @ I _n (8/20μs) and @ 6 kV (1,2/50 μs)	U _p N/PE 1.5 kV
Residual voltage L/N at 5 kA @ 5 kA (8/20μs)	U _{p-5kA} 1.2 kV
Protection level N/PE at 5 kA @ 5 kA (8/20μs)	U _{p-5kA} 1.2 kV
Admissible short-circuit current	I _{sc} 50 000 A
Mechanical Characteristics	
Technology	MOV+GDT
SPD configuration	3-phase+Neutral
Connection to Network	By screw terminals: 2.5-25mm ² (35mm ² rigid)
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	T _u -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	1 mechanical indicator by pole - Red/Green
Spare module(s)	MDAC50-320+MDAC50G-320
Remote signaling of disconnection	option DAC50S-31-320: output on changeover contact
Wiring for remote signaling	1.5 mm ² max.
Max. Voltage/Current for remote signaling	250 V / 0.5 A (AC) / 30 V / 3 A (DC)
Dimensions	See diagram - 4TE (EN43880)
Weight	0.347 kg
Disconnectors	
Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Back-up protection device	50 A min. - 125 A max. - Fuses Type gG
Standards	
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	ÖVE / UL
Part number	
821110334	

