





CITEL BN08-V

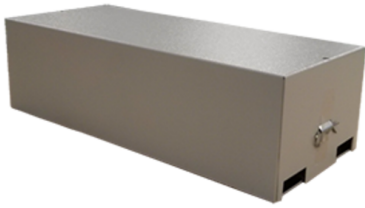

- Metal enclosures for E280
- Max. number of pairs : 8

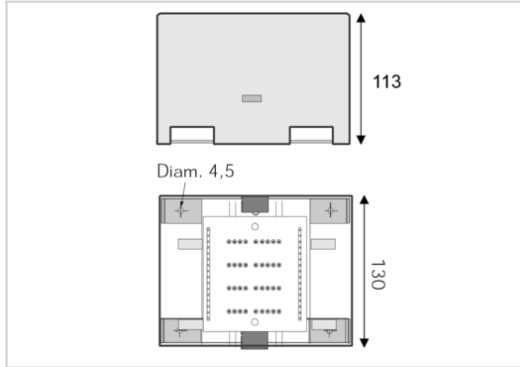

Electrical Characteristics		
Network		Low current
Max. frequency	f max.	> 20 MHz
Insertion loss		< 1 dB
Max. load current	IL	10 A
Max. discharge current(max. withstand @ 8/20 μs by pole)	I _{max}	10 kA
Impulse current(2 x 10/350μs Test - D1 Category)	I _{imp}	2.5 kA
Nominal discharge current(8/20μs Test x 10 - C2 Category)	I _n	5 kA
Mechanical Characteristics		
SPD configuration		8 pairs max
Format		Metallic box
Mounting		Wall
Housing material		Metal
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Connection		screw terminal - max. section 1,5 mm ²
Max. number of E280s		4.0000
Max. number of pairs		8.0000
Dimensions		See diagram
Part number		
71347		

