




Coordination inductor

CITEL

DSH2x16



- ↳ Coordination inductors for surge protectors
- ↳ For use with the DS series
- ↳ 2 x 16 A

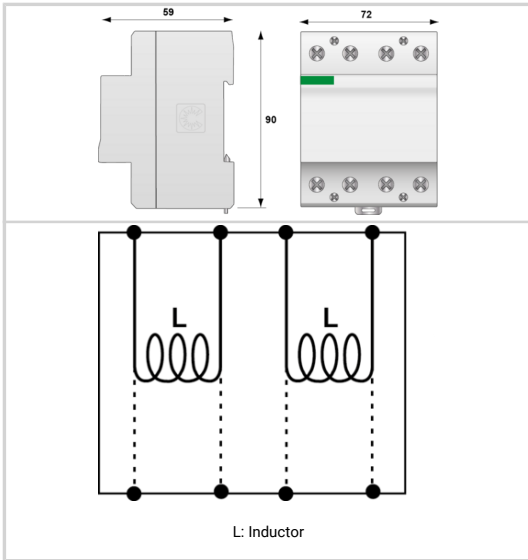

| Electrical Characteristics | | |
|----------------------------|----|-----------------------------------|
| Max. AC operating voltage | Uc | 500 Vac |
| Max. load current @25°C | IL | 2 x 16 A |
| Line inductance (± 10 %) | | 2 x 15 µH |
| Mechanical Characteristics | | |
| Connection to Network | | By screw terminals: 6-35mm² |
| Format | | 1-pole modular box |
| Mounting | | Symmetrical rail 35 mm (EN 60715) |
| Housing material | | Thermoplastic UL94 V-0 |
| Operating temperature | Tu | -40/+85°C |
| Protection rating | | IP20 |
| Wiring mode | | 1 DSH in series on 2 active wires |
| Dimensions | | See diagram |
| Weight | | 0.37 kg |
| Part number | | |
| 2690 | | |

