




CITEL

10 gigabit POE ++ surge protector

CWMJ8-POE-C6A



- ▶ POE++ Compatible (IEEE 802.3bt) -10Gb (5-100m) with Cat6A S/FTP cabling
- ▶ Shielded RJ45 connectors
- ▶ Outdoor applications, IP66 (NEMA 4/4X)
- ▶ Plastic enclosure, UL94-V0
- ▶ Conforms to IEC/EN 61643-21
- ▶ SPD categories D1, C3, C2, C1

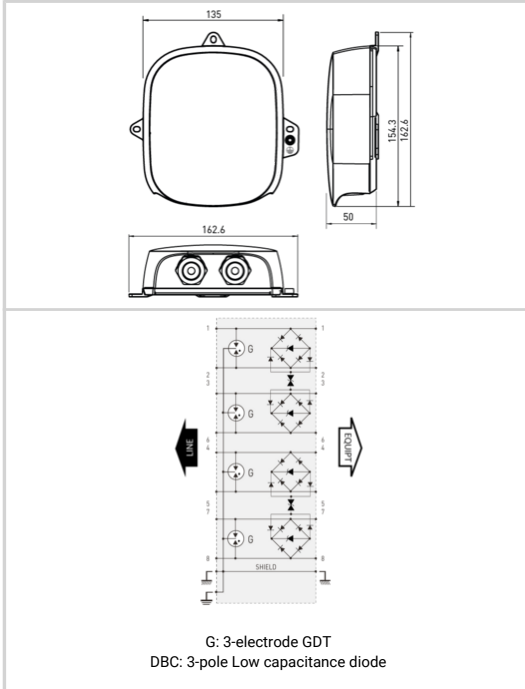

Electrical Characteristics	
Network	10Gb/s on Cat6A S/FTP cabling
Protection modes (network)	CM / DM (common mode / differential mode)
Protection modes (POE)	CM / DM (common mode / differential mode)
Transmission standard	IEEE 802.3bt
Lightning Protection Zones (LPZ)	0 - 3
Max. DC operating voltage	Uc 8 Vdc
Max. operating voltage (POE)	Uc 60 Vdc
Max. frequency	f max. 500 MHz
Max. data rate	10 Gbps
Max. load current @25°C	IL 2 A
Max. POE power (4PPOE)	90 W
Max. discharge current max. withstand @ 8/20 μs, X-C (Line/Earth)	I _{max} 2 kA
Protection Level C3 category (10/1000μs), 300 applications@10 A, X-X (Line/Line)	Up < 70 V
Protection level C3 category (10/1000μs), 300 applications@10 A, X-C (Line/Earth)	Up < 70 V
Protection Level C3 Category (10/1000μs), 300 applications @ 10A, (Pair-Pair, POE)	Up < 100 V
Impulse current D1 category (10/350μs), 2 applications, X-C (Line/Earth)	I _{imp} 500 A
Nominal discharge current C1 category (8/20μs), 300 applications X-X (Line/Line)	I _n 1kV / 500A
Nominal discharge current C2 category (8/20μs), 10 applications X-C (Line/Earth)	I _n 4 kV / 2 kA
Line resistance (± 10%)	0 Ohm
Capacitance @1MHz, X-C (Line/Earth)	C < 5 pF
Mechanical Characteristics	
Technology	GDT+Clamping diode
SPD configuration	8 wires+shielded
Connection to Network	RJ45 shielded connectors Female input/output
Cable glands	Plastic/Rubber
Format	Plastic Enclosure with connectors input/output
Mounting	Wall / Plate
Accessory(s) provided	screw + nut + cable shoe
Housing material	Thermoplastic UL94 V-0
Operating temperature	Tu -40/+85°C
Protection rating	IP66
Failsafe mode	Short-circuit
Pinout	(1-2)(3-6)(4-5)(7-8)
Dimensions	See diagram
Weight	0.29 kg / 0.64 lbs
Standards	
Standards compliance	IEC 61643-21 / EN 61643-21 / UL497B / IEEE 802.3af/3at/3bt, ANSI/TIA-568-c.1
Certification	UL 497B
Part number	
581544	

