




CITEL

MJ8-POE-C6A

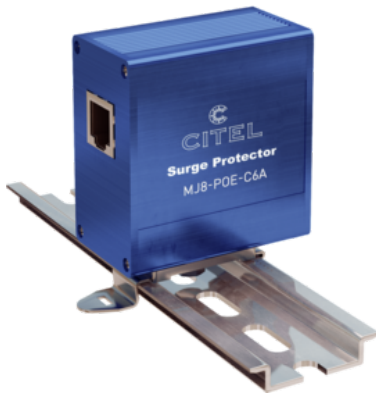

- POE++ compatible
- Gigabit Ethernet (Cat.6A)
- Shielded enclosure and connectors
- 2 kA discharge capability
- UL497B certified
- IEC 61643-21, EN 61643-21 compliance



	Electrical Characteristics																																																	
<p>G: 3-electrode GDT DBC: 3-pole Low capacitance diode</p>	<table border="1"> <tr> <td>Network</td> <td colspan="2">10Gigabit Ethernet - Cat 6A cabling specification</td> </tr> <tr> <td>Protection modes (network)</td> <td colspan="2">CM/DM</td> </tr> <tr> <td>Protection modes (POE)</td> <td colspan="2">CM/DM</td> </tr> <tr> <td>Nominal line voltage</td> <td>Un</td> <td>48 Vdc</td> </tr> <tr> <td>Max. DC operating voltage</td> <td>Uc</td> <td>60 Vdc</td> </tr> <tr> <td>Max. frequency</td> <td>f max.</td> <td>500 MHz</td> </tr> <tr> <td>Max. data rate</td> <td colspan="2">10 Gbps</td> </tr> <tr> <td>Max. load current @25°C</td> <td>IL</td> <td>2 A</td> </tr> <tr> <td>Protection Level C3 category (10/1000µs), 300 applications@10 A, X-X (Line /Line)</td> <td>Up</td> <td>70 V</td> </tr> <tr> <td>Protection level C3 category (10/1000µs), 300 applications@10 A, X-C (Line /Earth)</td> <td>Up</td> <td>500 V</td> </tr> <tr> <td>Protection Level C3 Category (10/1000µs), 300 applications @ 10A, (Pair-Pair, POE)</td> <td>Up</td> <td>80 V</td> </tr> <tr> <td>Impulse current 2 x 10/350µs Test - D1 Category</td> <td>limp</td> <td>400 A</td> </tr> <tr> <td>Line/Line Nominal discharge current C2 Category</td> <td>In L/L</td> <td>500 A</td> </tr> <tr> <td>Nominal Discharge Current, X-C (Line/Earth) 8/20µs Test x 10 - C2 Category</td> <td>In L/PE</td> <td>2000 A</td> </tr> <tr> <td>Line resistance (± 10%)</td> <td colspan="2">0 Ohm</td> </tr> <tr> <td>Capacitance @1MHz, X-C (Line/Earth)</td> <td>C</td> <td>< 5 pF</td> </tr> </table>		Network	10Gigabit Ethernet - Cat 6A cabling specification		Protection modes (network)	CM/DM		Protection modes (POE)	CM/DM		Nominal line voltage	Un	48 Vdc	Max. DC operating voltage	Uc	60 Vdc	Max. frequency	f max.	500 MHz	Max. data rate	10 Gbps		Max. load current @25°C	IL	2 A	Protection Level C3 category (10/1000µs), 300 applications@10 A, X-X (Line /Line)	Up	70 V	Protection level C3 category (10/1000µs), 300 applications@10 A, X-C (Line /Earth)	Up	500 V	Protection Level C3 Category (10/1000µs), 300 applications @ 10A, (Pair-Pair, POE)	Up	80 V	Impulse current 2 x 10/350µs Test - D1 Category	limp	400 A	Line/Line Nominal discharge current C2 Category	In L/L	500 A	Nominal Discharge Current, X-C (Line/Earth) 8/20µs Test x 10 - C2 Category	In L/PE	2000 A	Line resistance (± 10%)	0 Ohm		Capacitance @1MHz, X-C (Line/Earth)	C	< 5 pF
Network	10Gigabit Ethernet - Cat 6A cabling specification																																																	
Protection modes (network)	CM/DM																																																	
Protection modes (POE)	CM/DM																																																	
Nominal line voltage	Un	48 Vdc																																																
Max. DC operating voltage	Uc	60 Vdc																																																
Max. frequency	f max.	500 MHz																																																
Max. data rate	10 Gbps																																																	
Max. load current @25°C	IL	2 A																																																
Protection Level C3 category (10/1000µs), 300 applications@10 A, X-X (Line /Line)	Up	70 V																																																
Protection level C3 category (10/1000µs), 300 applications@10 A, X-C (Line /Earth)	Up	500 V																																																
Protection Level C3 Category (10/1000µs), 300 applications @ 10A, (Pair-Pair, POE)	Up	80 V																																																
Impulse current 2 x 10/350µs Test - D1 Category	limp	400 A																																																
Line/Line Nominal discharge current C2 Category	In L/L	500 A																																																
Nominal Discharge Current, X-C (Line/Earth) 8/20µs Test x 10 - C2 Category	In L/PE	2000 A																																																
Line resistance (± 10%)	0 Ohm																																																	
Capacitance @1MHz, X-C (Line/Earth)	C	< 5 pF																																																
Mechanical Characteristics																																																		
	<table border="1"> <tr> <td>Technology</td> <td colspan="2">GDT+Clamping diode</td> </tr> <tr> <td>SPD configuration</td> <td colspan="2">4 pairs+shielded</td> </tr> <tr> <td>Connection to Network</td> <td colspan="2">RJ45 shielded connectors Female input/output</td> </tr> <tr> <td>Format</td> <td colspan="2">Metallic box with connectors input/output</td> </tr> <tr> <td>Mounting</td> <td colspan="2">Mounting flange,Screw lug, DIN Rail</td> </tr> <tr> <td>Accessory(s) provided</td> <td colspan="2">DIN rail adapter, screw, screw nut, earthing plate, countersunk screw, cable shoe</td> </tr> <tr> <td>Housing material</td> <td colspan="2">Aluminium</td> </tr> <tr> <td>Operating temperature</td> <td>Tu</td> <td>-40/+85°C</td> </tr> <tr> <td>Protection rating</td> <td colspan="2">IP20</td> </tr> <tr> <td>Failsafe mode</td> <td colspan="2">Short-circuit</td> </tr> <tr> <td>Disconnection indicator</td> <td colspan="2">Transmission interrupt - default mode 2</td> </tr> <tr> <td>Pinout</td> <td colspan="2">(1-2)(3-6)(4-5)(7-8)</td> </tr> <tr> <td>Dimensions</td> <td colspan="2">See diagram</td> </tr> <tr> <td>Weight</td> <td colspan="2">0.106 kg</td> </tr> </table>		Technology	GDT+Clamping diode		SPD configuration	4 pairs+shielded		Connection to Network	RJ45 shielded connectors Female input/output		Format	Metallic box with connectors input/output		Mounting	Mounting flange,Screw lug, DIN Rail		Accessory(s) provided	DIN rail adapter, screw, screw nut, earthing plate, countersunk screw, cable shoe		Housing material	Aluminium		Operating temperature	Tu	-40/+85°C	Protection rating	IP20		Failsafe mode	Short-circuit		Disconnection indicator	Transmission interrupt - default mode 2		Pinout	(1-2)(3-6)(4-5)(7-8)		Dimensions	See diagram		Weight	0.106 kg							
Technology	GDT+Clamping diode																																																	
SPD configuration	4 pairs+shielded																																																	
Connection to Network	RJ45 shielded connectors Female input/output																																																	
Format	Metallic box with connectors input/output																																																	
Mounting	Mounting flange,Screw lug, DIN Rail																																																	
Accessory(s) provided	DIN rail adapter, screw, screw nut, earthing plate, countersunk screw, cable shoe																																																	
Housing material	Aluminium																																																	
Operating temperature	Tu	-40/+85°C																																																
Protection rating	IP20																																																	
Failsafe mode	Short-circuit																																																	
Disconnection indicator	Transmission interrupt - default mode 2																																																	
Pinout	(1-2)(3-6)(4-5)(7-8)																																																	
Dimensions	See diagram																																																	
Weight	0.106 kg																																																	
Standards																																																		
	<table border="1"> <tr> <td>Standards compliance</td> <td colspan="2">IEC 61643-21/ EN 61643-21 / UL497B IEEE 802-3af/3at/3bt/ ANSI/TIA-568-C.1</td> </tr> <tr> <td>Certification</td> <td colspan="2">UL 497B</td> </tr> </table>		Standards compliance	IEC 61643-21/ EN 61643-21 / UL497B IEEE 802-3af/3at/3bt/ ANSI/TIA-568-C.1		Certification	UL 497B																																											
Standards compliance	IEC 61643-21/ EN 61643-21 / UL497B IEEE 802-3af/3at/3bt/ ANSI/TIA-568-C.1																																																	
Certification	UL 497B																																																	
Part number																																																		
	581541																																																	

