




DLAWTS1-48D3



- Surge protection for 1-pair
- Pluggable protection module
- Optical fault indication
- Remote signalling (DLAWTS1-48DC required for power supply)
- Indirect shield connection
- Indirect earthing
- Signal interruption when module is disconnected
- Conforms to IEC 61643-21, VDE 0845-3-1 and UL497A

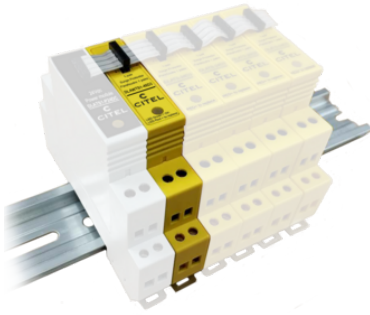

	Electrical Characteristics																																																				
<p>G: 3-electrode gas tube Gb: 2-electrode gas tube PTC: Thermal resistor R: Resistor D: Clamping diode Vi: Indicator</p>	<table border="1"> <tr><td>Network</td><td></td><td>RNIS-T0, 48 V line</td></tr> <tr><td>Nominal line voltage</td><td>Un</td><td>48 V</td></tr> <tr><td>Max. AC operating voltage</td><td>Uc</td><td>37 Vac</td></tr> <tr><td>Max. DC operating voltage</td><td>Uc</td><td>53 Vdc</td></tr> <tr><td>Max. frequency</td><td>f max.</td><td>> 3 MHz</td></tr> <tr><td>Insertion loss</td><td></td><td>< 1 dB</td></tr> <tr><td>Max. load current @25°C</td><td>IL</td><td>300 mA</td></tr> <tr><td>Max. discharge current max. withstand @ 8/20 µs by pole</td><td>Imax</td><td>20 kA</td></tr> <tr><td>Line inductance</td><td></td><td>No</td></tr> <tr><td>Protection mode(s)</td><td></td><td>Common/Differential mode</td></tr> <tr><td>Protection level</td><td></td><td></td></tr> <tr><td>Following the test category C3 (IEC61643-21) - Line/Line</td><td>Up</td><td>70 V</td></tr> <tr><td>Max. capacitance</td><td>C</td><td>< 50 pF</td></tr> <tr><td>Impulse current 2 x 10/350µs Test - D1 Category</td><td>Iimp</td><td>5 kA</td></tr> <tr><td>Nominal discharge current C2 Category</td><td>In</td><td>5 kA</td></tr> <tr><td>Line/Line Nominal discharge current C2 Category</td><td>In L/L</td><td>5 kA</td></tr> <tr><td>Nominal Discharge Current, X-C (Line/Earth) 8/20µs Test x 10 - C2 Category</td><td>In L/PE</td><td>5 kA</td></tr> </table>		Network		RNIS-T0, 48 V line	Nominal line voltage	Un	48 V	Max. AC operating voltage	Uc	37 Vac	Max. DC operating voltage	Uc	53 Vdc	Max. frequency	f max.	> 3 MHz	Insertion loss		< 1 dB	Max. load current @25°C	IL	300 mA	Max. discharge current max. withstand @ 8/20 µs by pole	Imax	20 kA	Line inductance		No	Protection mode(s)		Common/Differential mode	Protection level			Following the test category C3 (IEC61643-21) - Line/Line	Up	70 V	Max. capacitance	C	< 50 pF	Impulse current 2 x 10/350µs Test - D1 Category	Iimp	5 kA	Nominal discharge current C2 Category	In	5 kA	Line/Line Nominal discharge current C2 Category	In L/L	5 kA	Nominal Discharge Current, X-C (Line/Earth) 8/20µs Test x 10 - C2 Category	In L/PE	5 kA
Network		RNIS-T0, 48 V line																																																			
Nominal line voltage	Un	48 V																																																			
Max. AC operating voltage	Uc	37 Vac																																																			
Max. DC operating voltage	Uc	53 Vdc																																																			
Max. frequency	f max.	> 3 MHz																																																			
Insertion loss		< 1 dB																																																			
Max. load current @25°C	IL	300 mA																																																			
Max. discharge current max. withstand @ 8/20 µs by pole	Imax	20 kA																																																			
Line inductance		No																																																			
Protection mode(s)		Common/Differential mode																																																			
Protection level																																																					
Following the test category C3 (IEC61643-21) - Line/Line	Up	70 V																																																			
Max. capacitance	C	< 50 pF																																																			
Impulse current 2 x 10/350µs Test - D1 Category	Iimp	5 kA																																																			
Nominal discharge current C2 Category	In	5 kA																																																			
Line/Line Nominal discharge current C2 Category	In L/L	5 kA																																																			
Nominal Discharge Current, X-C (Line/Earth) 8/20µs Test x 10 - C2 Category	In L/PE	5 kA																																																			
<p>Connection ribbons available:</p> <table border="1"> <thead> <tr> <th>Nb of pole</th> <th>Ref. Ribbon</th> </tr> </thead> <tbody> <tr> <td>2 - 5</td> <td>R-BUS 5P (301134)</td> </tr> <tr> <td>6 - 10</td> <td>R-BUS 10P (301133)</td> </tr> <tr> <td>11 - 25</td> <td>R-BUS 25P (301135)</td> </tr> <tr> <td>26 - 49</td> <td>R-BUS 49P (301143)</td> </tr> </tbody> </table>	Nb of pole	Ref. Ribbon	2 - 5	R-BUS 5P (301134)	6 - 10	R-BUS 10P (301133)	11 - 25	R-BUS 25P (301135)	26 - 49	R-BUS 49P (301143)	Mechanical Characteristics																																										
Nb of pole	Ref. Ribbon																																																				
2 - 5	R-BUS 5P (301134)																																																				
6 - 10	R-BUS 10P (301133)																																																				
11 - 25	R-BUS 25P (301135)																																																				
26 - 49	R-BUS 49P (301143)																																																				
Standards																																																					
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497A																																																			
Part number																																																					
6421041																																																					

