




- ↳ Connector strip for 2 x E280
- ↳ Max. number of pairs : 4



Electrical Characteristics		
Network		Low current
Max. frequency	f max.	> 20 MHz
Insertion loss		< 1 dB
Max. load current @25°C	IL	5 A
Max. discharge current max. withstand @ 8/20 μs by pole	I <sub>max</sub>	10 kA
Impulse current 2 x 10/350 μs Test - D1 Category	I <sub>imp</sub>	2.5 kA
Nominal discharge current C2 Category	I <sub>n</sub>	5 kA
Mechanical Characteristics		
SPD configuration		4 pairs
Connection to Network		Earth pin
Format		Strip
Mounting		MDF
Housing material		Thermoplastic UL94 V-0
Operating temperature	T <sub>u</sub>	-40/+85°C
Protection rating		IP20
Connection		connector CAD
Max. number of E280s		2.0000
Max. number of pairs		4.0000
Dimensions		See diagram
Weight		0.12 kg
Part number		
71480		

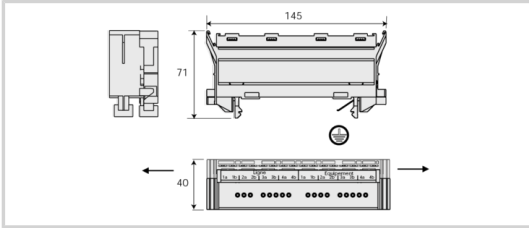