




CITEL

Type 2 AC surge protector - Re-inforced - 1-pole - pluggable

DAC80-10-150



- ↳ Re-inforced Type 2 AC surge protector
- ↳ In : 40 kA
- ↳ Imax : 80 kA
- ↳ Pluggable module for each phase
- ↳ Remote signaling option
- ↳ EN 61643-11, IEC 61643-11 certified
- ↳ UL1449 ed.5 compliance

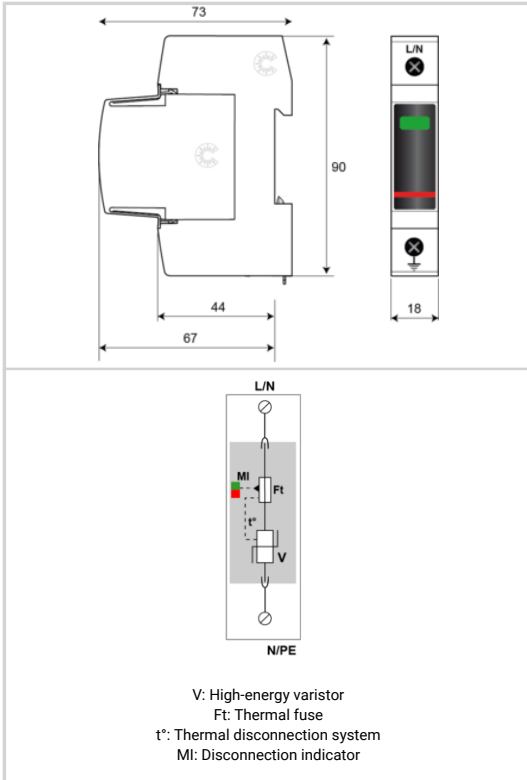

| Electrical Characteristics | | |
|--|--------|---|
| SPD type | IEC | 2 |
| Max. AC operating voltage | Uc | 150 Vac |
| Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection | UT | 180 Vac withstand |
| Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection | UT | 230 Vac disconnection |
| Residual Current | Ipe | < 1 mA |
| Leakage current to Ground | | |
| Follow current | If | None |
| Nominal discharge current 15 x 8/20 μs impulses | In | 40 kA |
| Max. discharge current max. withstand @ 8/20 μs by pole | Imax | 80 kA |
| Protection level @ In (8/20μs) | Up | 1.2 kV |
| Residual voltage at 5 kA @ 5 kA (8/20μs) | Up-5kA | 0.7 kV |
| Admissible short-circuit current | Iscsr | 50 000 A |
| Mechanical Characteristics | | |
| Technology | | MOV |
| SPD configuration | | Single phase |
| Connection to Network | | By screw terminals: 2.5-25mm ² (35mm ² rigid) |
| Format | | Plug-in modular box |
| Mounting | | Symmetrical rail 35 mm (EN 60715) |
| Housing material | | Thermoplastic UL94 V-0 |
| Operating temperature | Tu | -40/+85°C |
| Protection rating | | IP20 |
| Failsafe mode | | Disconnection from AC network |
| Disconnection indicator | | 1 mechanical indicator - Red/Green |
| Spare module(s) | | MDAC80-150 |
| Remote signaling of disconnection | | option DAC80S-10-150 : output on changeover contact |
| Dimensions | | See diagram - 1TE (EN43880) |
| Weight | | 0.118 kg |
| Disconnectors | | |
| Thermal disconnector | | Internal |
| Installation ground fault breaker | | Type 'S' or delayed |
| Back-up protection device | | Fuses Type gG - 125 A |
| Standards | | |
| Standards compliance | | IEC 61643-11 / EN 61643-11 / UL1449 ed.5 |
| Certification | | KEMA |
| Part number | | |
| 821210111 | | |

