




- Protection against temporary overvoltages
- Automatic delayed switch-off and switch-on again
- Status display (green, red)
- Easy installation on top-hat rail
- Complies with EN 50550 standard



Electrical Characteristics	
Network	230 V single-phase
Mechanical Characteristics	
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Disconnection indicator	1 mechanical indicator - Red/Green
Dimensions	See diagram
Standards	
Standards compliance	IEC 63052
Part number	3589015

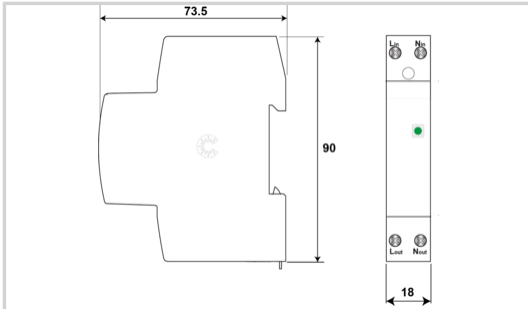