




NEW CITEL PV SPD

- ↳ Combined SPD type 1+2+3
- ↳ CTC-Technology
- ↳ Discharge capacity per pole: limp/total= 6.25/12.5 kA (10/350 μs); In/total= 15 /60 kA (8/20 μs)
- ↳ Safe disconnecting device
- ↳ Fault-resistant Y-circuit
- ↳ Remote signaling
- ↳ Complies with the IEC 61643-31, EN 61643-31, EN 50539-11, UL1449 ed.5 and UTE C 61-740-51 standards

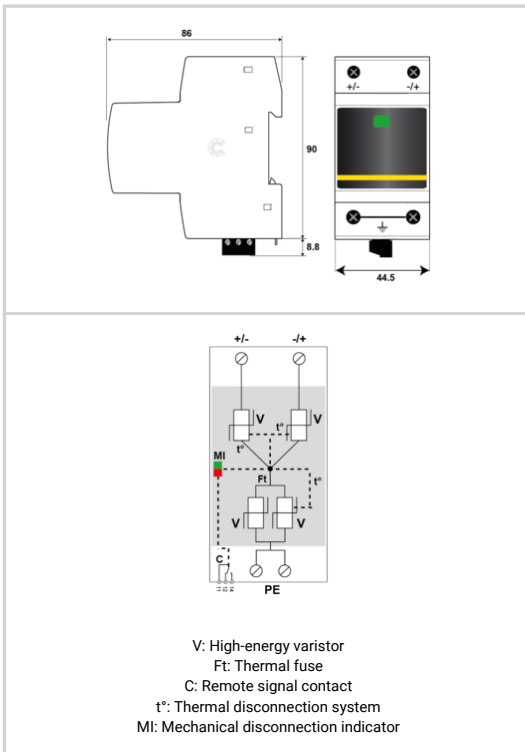

| Electrical Characteristics | | |
|-------------------------------------------------------------------|------------|-------------------------------------------------------------------------|
| SPD type | | 1+2+3 |
| Network | | PV 1200 Vdc |
| Nominal PV voltage | Uocstc | 1000 Vdc |
| Max. PV operating voltage | Ucpv | 1200 Vdc |
| Residual Current Leakage current to Ground | Ipe | < 0.1 mA |
| PV Permanent Operating current Current consumption at Ucpv | Icpv | < 0.1 mA |
| Follow current | If | None |
| Nominal discharge current 15 x 8/20 μs impulses | In | 20 kA |
| Max. discharge current max. withstand @ 8/20 μs by pole | Imax | 40 kA |
| Total Maximum discharge current max. total withstand @ 8/20 μs | Imax Total | 60 kA |
| Impulse current by pole max. withstand 10/350μs by pole | Iimp | 6.25 kA |
| Total lightning current max. total withstand @ 10/350μs | Itotal | 12.5 kA |
| Current withstand short circuit PV | Iscpv | 15 000 A |
| Connection mode(s) | | +/-/PE |
| Protection mode(s) | | Common/Differential mode |
| Protection level +/- @ In (8/20μs) | Up | 4.3 kV |
| Protection level +/-PE (-/PE) @ In (8/20μs) | Up | 4.3 kV |
| Mechanical Characteristics | | |
| Technology | | MOV |
| Connection to Network | | By screw terminals: 2.5-25mm ² (35mm ²) / by bus |
| Format | | Compact monobloc box |
| Mounting | | Symmetrical rail 35 mm (EN 60715) |
| Housing material | | Thermoplastic UL94 V-0 |
| Operating temperature | Tu | -40/+85°C |
| Protection rating | | IP20 |
| Failsafe mode | | All pole disconnection from PV network |
| Disconnection indicator | | 1 mechanical indicator - Red/Green |
| Remote signaling of disconnection | | Output on changeover contact |
| Max. Voltage/Current for remote signaling | | 250 V / 0.5 A (AC) / 30 V / 3 A (DC) |
| Dimensions | | See diagram - 2.5TE (EN43880) |
| Weight | | 0.433 kg |
| Disconnectors | | |
| Thermal disconnector | | CTC Technology integrated |
| Back-up protection device | | Without |
| Standards | | |
| Standards compliance | | IEC 61643-31 / EN 61643-31 / EN 50539-11 / UL1449 ed.5 |
| Part number | | |
| 65212102 | | |

