




- Protection against permanent/temporary overvoltages of AC network
- For 120 Vac AC single-phase powerline
- Load current: up to 16 A
- Automatic operation: disconnection/reconnection
- Operating indicator
- Easy installation on DIN rail



Electrical Characteristics	
Network	120 V single-phase
Mechanical Characteristics	
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Disconnection indicator	1 mechanical indicator - Red/Green
Dimensions	See diagram
Standards	
Standards compliance	IEC 63052
Part number	358912

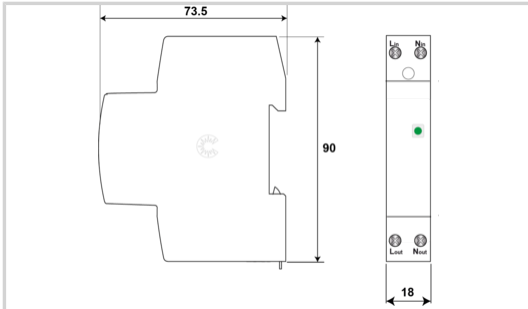