1-pair DIN rail plug-in Telecomsurge protector

DLAW-170

- Din rail plug-in surge protector
- 1-pair
- Uc : 170 V
- Shield wire protection
- Plug-out with line cut-off
- EN 61643-21 compliance

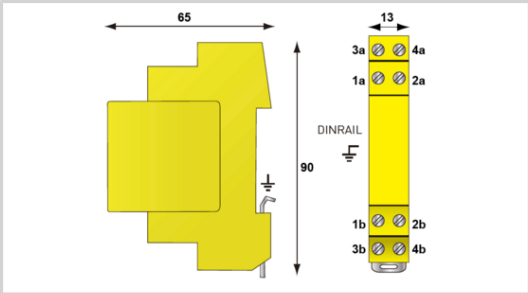

Electrical Characteristics		
Network		RTC, ADSL2, VDSL2
Nominal line voltage	Un	150 V
Max. DC operating voltage	Uc	170 Vdc
Max. frequency	f max.	> 10 MHz
Insertion loss		< 1 dB
Max. load current *@25°C*	IL	300 mA
Max. discharge current *max. withstand @ 8/20 µs by pole*	Imax	20 kA
Line inductance		No
Protection level *Following the test category C3 (IEC61643-21) - Line/Line*	Up	220 V
Protection level *Following the test category C3 (IEC61643-21) - Line/PE*	Up	20 V
Impulse current *2 x 10/350µs Test - D1 Category*	Iimp	5 kA
Line/Line Nominal discharge current *C2 Category*	In L/L	5 kA
Nominal Discharge Current, X-C (Line/Earth) *8/20µs Test x 10 - C2 Category*	In L/PE	5 kA
Line resistance		< 4.7 Ohm
Mechanical Characteristics		
Disconnection		Specific version with line cut-off in case of removal plug-in module
Technology		GDT+Clamping diode
SPD configuration		1-pair+shielded
Connection to Network		By screw terminal: cross section 0.5-2.5mm²
Format		Plug-in DIN box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Short-circuit
With line cut-off in case of removal plug-in module		Yes
Disconnection indicator		Transmission interrupt - default mode 2
Spare module(s)		DLAM-170
Dimensions		See diagram
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497A
Part number		
640805		