




# CITEL

## 1-pair DIN rail plug-in Data surge protector

### DLAH-48DBC



- ▶ Pluggable surge protection for «DIN» mounting
- ▶ Coordination inductor
- ▶ Up to 2.4 A line current
- ▶ Remote supply version
- ▶ All types of Telephone and Data lines
- ▶ Shield wire protection
- ▶ IEC 61643-21 compliance

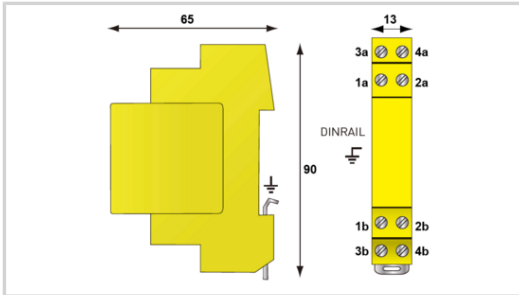

Electrical Characteristics	
Network	Fipway, WorldFIP, FieldBus-h2
Nominal line voltage	Un 48 V
Max. DC operating voltage	Uc 53 Vdc
Max. frequency	f max. > 20 MHz
Insertion loss	< 1 dB
Max. load current @25°C	IL 2.4 A
Max. discharge current max. withstand @ 8/20 μs by pole	Imax 20 kA
Line inductance	10uH
Protection level Following the test category C3 (IEC61643-21) - Line/Line	Up 75 V
Impulse current 2 x 10/350μs Test - D1 Category	Iimp 5 kA
Line/Line Nominal discharge current C2 Category	In L/L 5 kA
Nominal Discharge Current, X-C (Line/Earth) 8/20μs Test x 10 - C2 Category	In L/PE 5 kA
Line resistance	0 Ohm
Mechanical Characteristics	
Technology	GDT+Clamping diode
SPD configuration	1-pair+shielded
Connection to Network	By screw terminal: cross section 0.4-1.5mm <sup>2</sup>
Format	Plug-in DIN box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Failsafe mode	Short-circuit
Disconnection indicator	Transmission interrupt - default mode 2
Spare module(s)	DLAHM-48DBC
Dimensions	See diagram
Standards	
Standards compliance	IEC 61643-21 / EN 61643-21 / UL497A
Part number	
<b>641014</b>	

