





CITEL

Type 1+2 AC surge protector

DS134RS-400



- Discover our latest innovation : the [DAC1-13S-40-440](#)
- Type 1 + 2 AC multipolar surge protector
- In : 20 kA
- Iimp total : 50 kA
- Pluggable module for each phase
- Remote signaling
- EN 61643-11, IEC 61643-11 compliance

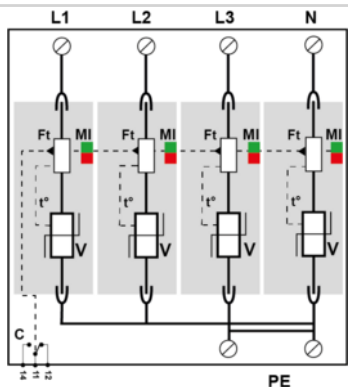

V: High-energy varistor
Ft: Thermal fuse
C: Remote signal contact
t*: Thermal disconnection system
MI: Disconnection indicator

Electrical Characteristics

SPD type	1+2
Network	230/400 V 3-phase+N
AC system	IT
Nominal line voltage	Un 400 Vac
Max. AC operating voltage	Uc 440 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 580 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 770 Vac disconnection
Follow current	If None
Nominal discharge current 15 x 8/20 μ s impulses	In 20 kA
Max. discharge current max. withstand @ 8/20 μ s by pole	Imax 50 kA
Impulse current by pole max. withstand 10/350 μ s by pole	Iimp 12.5 kA
Total lightning current max. total withstand @ 10/350 μ s	Itotal 50 kA
Withstand on overvoltages IEEE C62.41.1	20 kV
Specific energy by pole max. withstand 10/350 μ s	W/R 40 kJ/ohm
Connection mode(s)	L/PE and N/PE
Protection mode(s)	Common mode
Protection level N/PE @ In (8/20 μ s)	Up N/PE 1.7 kV
Protection level L/PE @ In (8/20 μ s)	Up L/PE 1.7 kV
Admissible short-circuit current	Iscrr 25 000 A

Mechanical Characteristics

Technology	MOV
SPD configuration	3-phase+Neutral
Connection to Network	By screw terminals: 2.5-25mm ² / by bus
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	1 mechanical indicator by pole
Spare module(s)	DSM130R-400
Remote signaling of disconnection	Output on changeover contact
Dimensions	See diagram

Disconnectors

Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Back-up protection device	Fuses Type gG - 125 A

Standards

Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	

Part number

571414

