






Type 2 PV surge protector

CITEL

DS50PVS- 800G/51

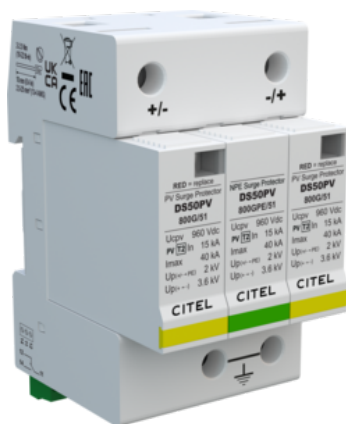

- › Type 2 surge protector for PV
- › In : 15kA / I_{max} : 40kA
- › Pluggable
- › Remote signaling
- › UL1149 ed.5 certified
- › IEC 61643-31, EN 61643-31, EN 50539-11, UL1449 ed.5 compliance



Electrical Characteristics

SPD type		2
Network		PV network 800 Vdc
Nominal PV voltage	U _{ocstc}	800 Vdc
Max. PV operating voltage	U _{cpv}	960 Vdc
Residual Current Leakage current to Ground	I _{pe}	None
PV Permanent Operating current Current consumption at U _{cpv}	I _{cpv}	< 0.1 mA
Follow current	I _f	None
Nominal discharge current 15 x 8/20 μ s impulses	I _n	15 kA
Max. discharge current max. withstand @ 8/20 μ s by pole	I _{max}	40 kA
Total Maximum discharge current max. total withstand @ 8/20 μ s	I _{max} Total	60 kA
Current withstand short circuit PV	I _{scpv}	15 000 A
Connection mode(s)		+/-/PE
Protection mode(s)		Common/Differential mode
Protection level +/- @ I _n (8/20 μ s)	U _p	3.6 kV
Protection level +/-PE (-/PE) @ I _n (8/20 μ s)	U _p	2 kV

Mechanical Characteristics

Technology		MOV+GDT
Connection to Network		By screw terminals: 2.5-25mm ² / by bus
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection SPD of the PV line
Disconnection indicator		2 mechanical indicators
Spare module(s)		DSM50PV-800G/51
Remote signaling of disconnection		Output on changeover contact
Dimensions		See diagram

Disconnectors

Thermal disconnector		Internal
Back-up protection device		Without

Standards

Standards compliance		IEC 61643-31 / EN 61643-31 / EN 50539-11 / UL1449 ed.5
Certification		

Part number

480291

