





# CITEL

## Type 2 PV surge protector

### DS50PV-600

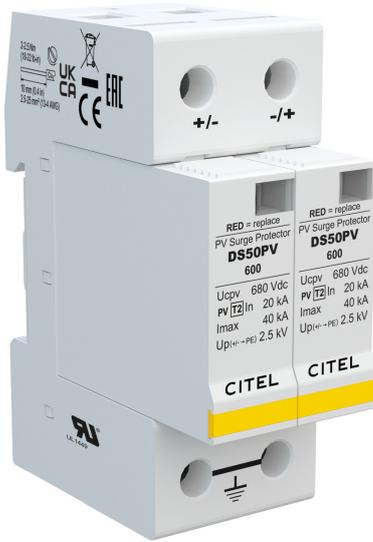

- › Type 2 surge protector for PV
- › In : 20kA / Imax : 40kA
- › Pluggable
- › Remote signaling (option)
- › Certified UL1449 ed.5
- › Compliance EN 50539-11 / IEC 61643-31 / EN 61643-31

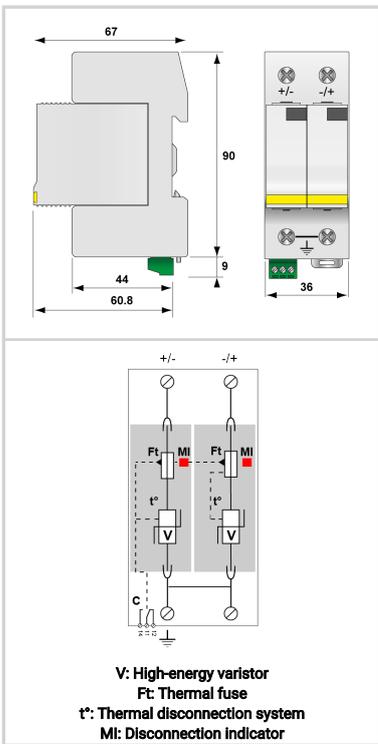

Electrical Characteristics		
SPD type	IEC	2
Nominal PV voltage	Uocstc	600 Vdc
Max. PV operating voltage	Ucpv	680 Vdc
Residual Current Leakage current to Ground	Ipe	None
PV Permanent Operating current Current consumption at Ucpv	Icpv	< 1 mA
Follow current	If	None
Nominal discharge current 15 x 8/20 μs impulses	In	20 kA
Max. discharge current max. withstand @ 8/20 μs by pole	Imax	40 kA
Current withstand short circuit PV	Iscpv	15 000 A
Protection mode(s)		Common mode
Protection level +/- @ In (8/20μs)	Up	5.1 kV
Protection level +/-PE (-/PE) @ In (8/20μs)	Up	2.5 kV
Mechanical Characteristics		
Connection to Network		By screw terminals: 4-25mm <sup>2</sup> / by bus
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Disconnection indicator		1 mechanical indicator by pole - Red/Green
Remote signaling of disconnection		Option DS50PVS-600 - output on changeover contact
Dimensions		See diagram
Weight		0.216 kg
Disconnectors		
Thermal disconnector		Internal
Standards		
Standards compliance		IEC 61643-31 / EN 61643-31 / EN 50539-11 / UL1449 ed.5
Certification		UL
Part number		
<b>480401</b>		

