




# CITEL

## Ultra Compact Type 3 hard wired surge protector

### MSB6-400



- ▶ Compact type 3 surge protector
- ▶ Wall mounting and hard wired connection
- ▶ Status indicators
- ▶ IP20
- ▶ EN 61643-11, IEC 61643-11 and UL1449 ed.5 compliance

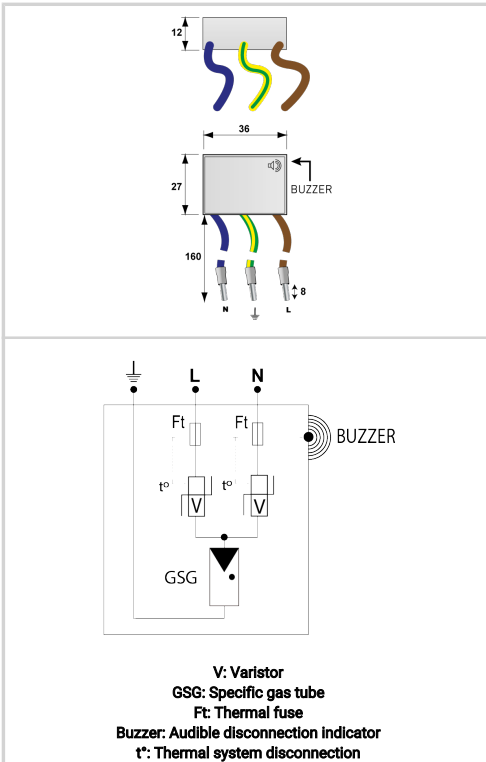

Electrical Characteristics		
SPD type	IEC	3
Network		230 V single-phase
AC system		TT-TN
Nominal line voltage	Un	230 V
Max. AC operating voltage	Uc	255 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac disconnection
Follow current	If	None
Nominal discharge current 15 x 8/20 $\mu$ s impulses	In	3 kA
Max. discharge current max. withstand @ 8/20 $\mu$ s by pole	Imax	6 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50 $\mu$ s - 8/20 $\mu$ s	Uoc	6 kV
Withstand on overvoltages IEEE C62.41.1		6 kV/6 kA
Protection mode(s)		Common/Differential mode
Protection level L/N @ In (8/20 $\mu$ s)	Up L/N	1.5 kV
Protection level L/PE @ In (8/20 $\mu$ s)	Up L/PE	1.5 kV
Admissible short-circuit current	Isc cr	3 000 A
Mechanical Characteristics		
Technology		MOV+GDT
Connection to Network		Wires
Mounting		AC outlet or screw terminal
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		Buzzer ON
Operating indicator		without
Dimensions		See diagram
Weight		0.02 kg
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		
Part number		
<b>561302</b>		

