





CITEL

Type 1+2 AC surge protector single-phase

DAC1-13-11-320



- Type 1 + 2 AC multipolar surge protector
- In : 20 kA
- Iimp: 12.5 kA
- Pluggable module for each phase
- Remote signaling (option)
- EN 61643-11, IEC 61643-11 certified
- UL1449 ed.5 compliance

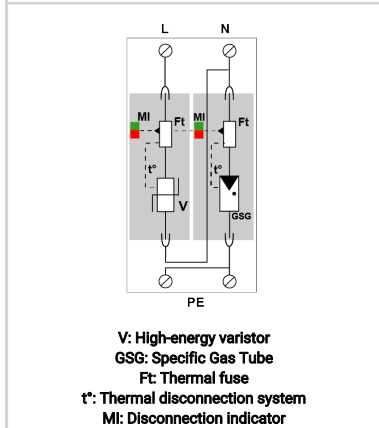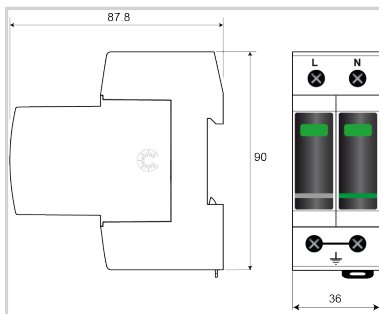

Electrical Characteristics		
SPD type	IEC	1+2
Network		230 V single-phase
AC system		TT-TN
Max. AC operating voltage	Uc	320 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac disconnection
Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection	UT	1200 V/300A/200 ms withstand
Residual Current		
Leakage current to Ground	Ipe	None
Follow current	If	None
Nominal discharge current 15 x 8/20 μs impulses	In	20 kA
Max. discharge current max. withstand @ 8/20 μs by pole	Imax	50 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	Imax Total	100 kA
Impulse current by pole max. withstand 10/350 μs by pole	Iimp	12.5 kA
Impulse current N/PE max. withstand 10/350 μs	Iimp N /PE	50 kA
Total lightning current max. total withstand @ 10/350 μs	Itotal	25 kA
Specific energy by pole max. withstand 10/350 μs	W/R	40 kJ/ohm
Protection mode(s)		L/N and N/PE
Protection level @ In (8/20 μs) and @ 6 kV (1,2/50 μs)	Up L/N	1.6 kV
Protection level N/PE @ In (8/20 μs) and @ 6 kV (1,2/50 μs)	Up N/PE	1.5 kV
Residual voltage L/N at 5 kA @ 5 kA (8/20 μs)	Up-5kA	1.2 kV
Protection level N/PE at 5 kA @ 5 kA (8/20 μs)	Up-5kA	1.2 kV
Admissible short-circuit current	Iscrr	50 000 A
Mechanical Characteristics		
Technology		MOV+GDT
SPD configuration		Single phase
Connection to Network		By screw terminals: 2.5-25mm² (35mm² rigid)
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator by pole - Red/Green
Spare module(s)		MDAC1-13-320 + MDAC1-25G-xxx
Remote signaling of disconnection		option : DAC1-13S-11-320 : output on changeover contact
Dimensions		See diagram - 2TE (EN43880)
Weight		0.278 kg
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		Fuse assembly: SFD1-13S-20 / or 125 A min. - 315 A max. - Fuses Type gG
Standards		



CITEL

Type 1+2 AC surge protector single-phase

DAC1-13-11-320

Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	KEMA
Part number	
821710332	

